

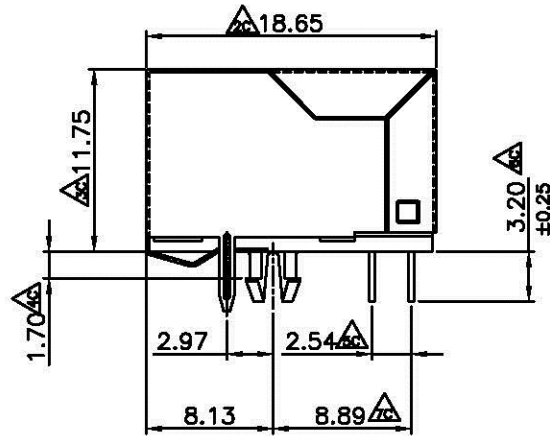


1 2 3 4 5 6

A

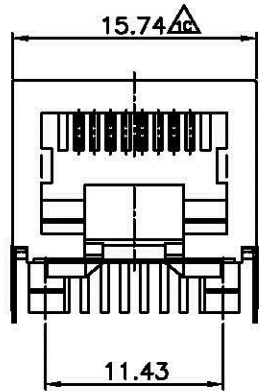

B

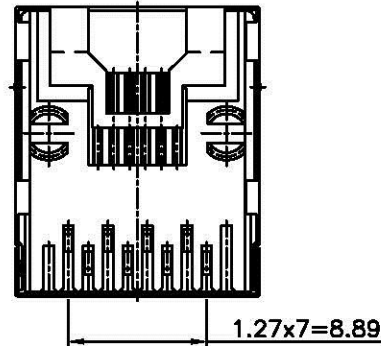

C


Electrical:
 1.Voltage Rating:125 Vac Rms.
 2.Current Rating:1.5 Amp.
 3.Contact Resistance:40 Milliohms Max.
 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:
 1.Operating:750 Cycles Min.

Environmental:
 1.Storage:-40°C To +85°C.
 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.

A

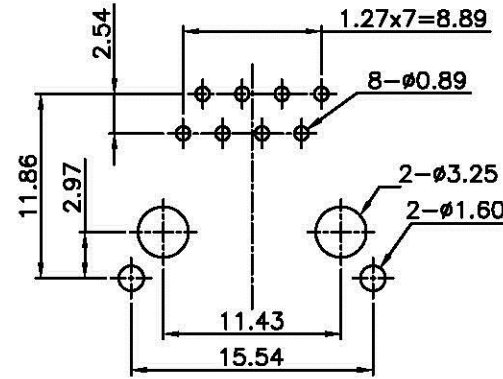

PCB LAYOUT/TOP VIEW


B

C

D

MATERIALS:
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 CONTACTS: PHOSPHOR BRONZE
 PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.
 SHIELD: BRASS PLATING NICKEL ALLOY.

6u" P/N :J014010158
 15u" P/N :J014010157
 30u" P/N :J014010158
 50u" P/N :J014010159

		All Connectors			
		<small>www.allconnectors.com 10000 10th Street, Suite 100, Dallas, TX 75243 972-412-1111</small>		<small>www.allconnectors.com 10000 10th Street, Suite 100, Dallas, TX 75243 972-412-1111</small>	
		UNIT	SCALE	SHEET	TITLE
		mm	1/1	1 of 1	RJ45 8P8C TH JACK (SHIELDED)F2. 97
		DRAWN BY	APPROVED BY		
		Alan	Alan		
			110329		
		General tolerance			
		30X	±0.15		
		25X	±0.25		
		15X	±0.38		
		8X	±0.50		
		AVE	±0.75		
REV	DESCRIPTION	DATE			REV.
					J014010156

1 2 3 4 5 6