Top Entry PCB Jack
(CAT.5, Shunted Type)



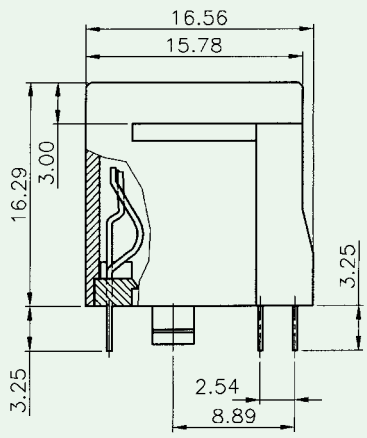

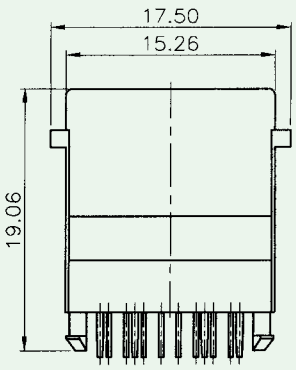



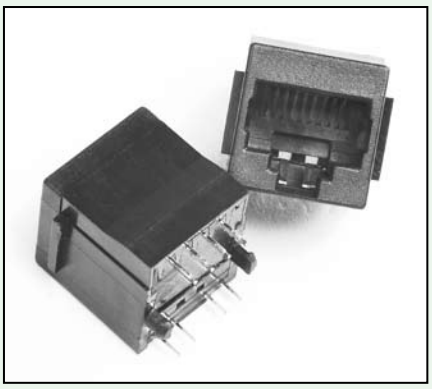

PCB Layout / Top View

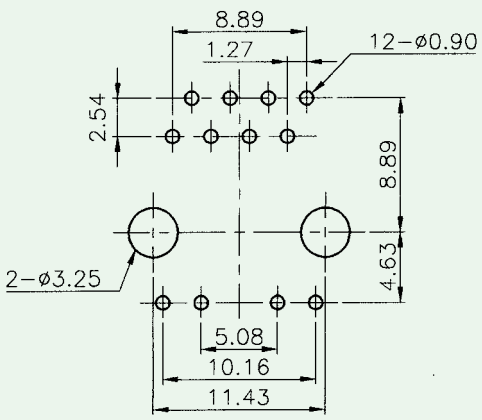

Materials

- **Housing** : Engineering Thermoplastic.
  Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact Area.
  Tin Plating Over Nickel In Solder Area.

Ordering Information

3009 □ - □ □ □ □ ST

- Series No.
- F = Flanged, L = Flangeless, S = Shielded, No Flange
- No. Of Positions: 8 or 10
- No. Of Contacts: 2, 4, 6, 8 or 10
- 1 = With Key, 2 = Without Key
- Gold Plating Options: 0 = Gold Flash, 1 = 6µ", 2 = 15µ", 3 = 30µ", 4 = 50µ"
- Shunted Type

All Connectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25