

**SPECIFICATIONS**

**1.MECHANICA:**

DURABILITY: 100 CYCLES

**2.PHYSICAL:**




CAGE: COPPER ALLOY

PLATING: NO PLATING.

OPERATING TEMPERATURE: -55°C TO +85°C

**3.RoHS DIRECTIVE COMPLIANCE:**

(LEAD-FREE) WAVE SOLDER CAPABLE TO 265±10°C, 10 SEC

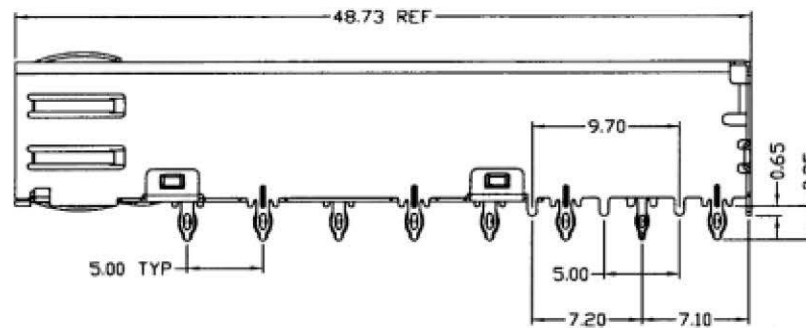

**RoHS Compliant**

**TOLERANCES ARE**

**All Connectors**

DRAWING BY CY

X ±

CHECKED BY GENIUS

X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.10


DATE

.XXX ±

ANG ±

SIZE A4

PROJECTION



**ORDER INFORMATION**

SFP-SCR-20-LF  
 SERIES | | | LEADFREE  
 | | | 20 WAY  
 | | | DIP 90°  
 | | | CAGE  
 | | | FEMALE

DESCRIPTION:

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009509 Fax: 0049 711 7009504  
 70254 Filderstadt - Germany Kettnerstr. 25