





Specifications	
Contact Terminal:	BSR-H 1.52t C2680 (65/35) Silver PTD BSR-H 1.46d R-35 Silver PTD
Plastic Core:	Nylon 101F NC010 UL94V2
Plastic Body:	EVA UE633 UL94
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 2A Max.


Characteristics
Solder Type
Straight Type
2 Pin

Substitute Items


Mating Items
D-2097

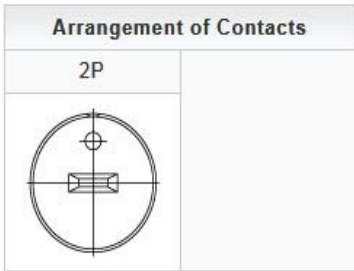

FRONT VIEW

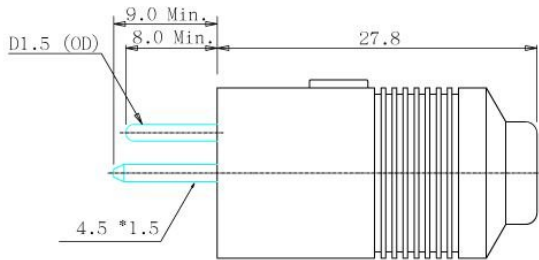

TOP VIEW



BACK VIEW

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Plug / 2 Pin

D-2004

DATE

UNIT: mm



1 / 1

A0

A4