



Specifications

Plastic Core:	Nylon 101F NC010 UL94V2
Contact Terminal:	BSR-H 1.5d R-35 Silver PTD
Cover:	BSR-H 0.5t C2680 (65/35) Nickel
Plastic Body:	Nylon 101F NC010 UL94V2
Plastic Trail:	PVC
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 2A Max.

Characteristics



Solder Type
Straight Type
5 Pin

Substitute Items


Mating Items

D-6096
D-6097


Arrangement of Contacts



FRONT VIEW

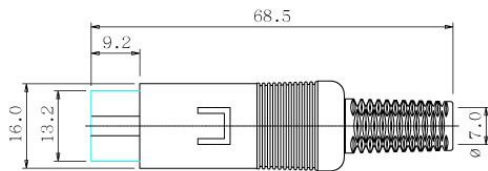

TOP VIEW A

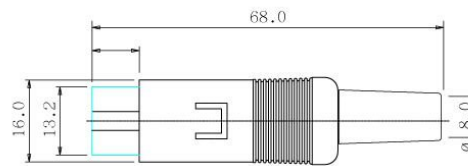

TOP VIEW B

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Plug / 5 Pin

D-6001

DATE

UNIT: mm

	1 / 1	A0	A4
--	-------	----	----