

A B C D E F G H

6



6

5

5

4

4

Specifications	
Plastic Core:	Nylon 101F NC010 UL94V2
Contact Terminal:	BSR-H 0.8d R-35 Silver PTD
Cover:	BSR-H 0.5t C2680 (65/35) Nickel
Plastic Body:	EVA UE633
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 2A Max.


Characteristics
Solder Type
Straight Type
13 Pin

Substitute Items

Mating Items
D-6095
D-6099


3

3

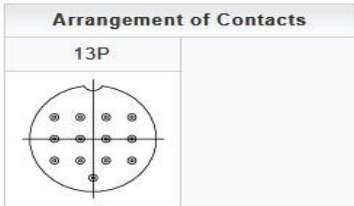

2

2

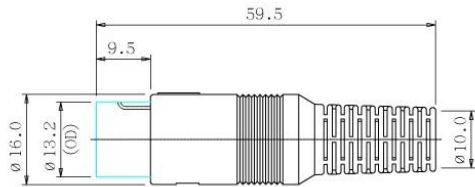

SIDE VIEW

1

1

**Allconnectors**

www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Plug / 13 Pin

D-6003

DATE

UNIT: mm



1 / 1

A0

A4

A B C D E F G H