



Specifications

Plastic Core:	Nylon 101F NC010 UL94V2
Contact Terminal:	BSR-H 0.2t C1519R Silver PTD
Cover:	BSR-H 0.5t C2680 (65/35) Nickel
Clip Apparatus:	BSR-H 0.5t C2680 (65/35) Nickel
Outside Body:	ABS PA-777D
Inside Body:	ABS PA-777D
Plastic Back:	ABS PA-777D
Plastic Trail:	PVC
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 1A Max

Characteristics



Solder Type
Quick Lock
Right Angle
13 Pin

Substitute Items


Mating Items

D-6095
D-1090
D-1091

Arrangement of Contacts

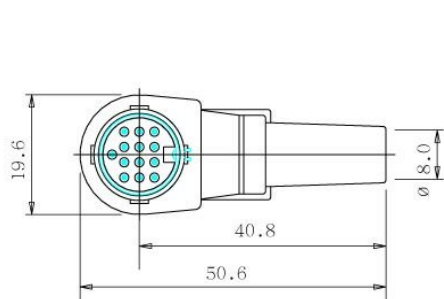

FRONT VIEW

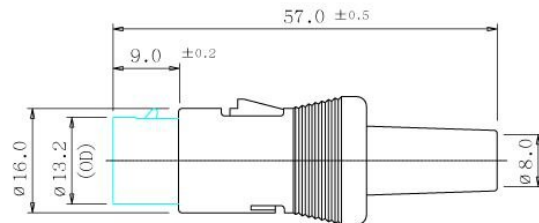

SIDE VIEW

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Plug / 13 Pin

D-6006

DATE

UNIT: mm



1 / 1

A0

A4