



**Specifications**

Contact Resistance:	30mΩ Max.
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	100V AC 1A Max.
	12V DC 2A Max.
Insertion Force:	4.5Kg Max.
Withdrawal Force:	0.6Kg~3Kg

**Characteristics**

Solder Type
Quick Lock
20 Pin


**Substitute Items**


**Mating Items**


D-6100

**Arrangement of Contacts**

14P	



FRONT VIEW

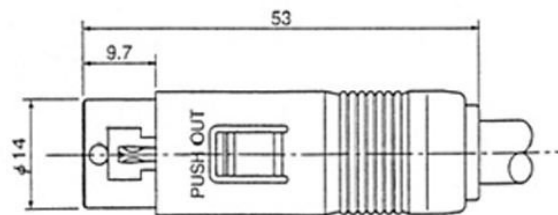

SIDE VIEW

**All Connectors**

www.allconnectors.eu | info@allconnectors.eu  
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Plug / 20 Pin

D-6010

DATE

UNIT: mm



1 / 1

A0

A4