



Specifications

Plastic Core:	Nylon 101F NC010 UL94V2
Contact Terminal:	BSR-H 0.2t C5191R Silver PTD
Cover:	BSR-H 0.5t C2680 (65/35) Nickel
Plastic Body:	Nylon 101F NC010 UL94V2
Plastic Trail:	PVC UL94
Contact rating:	3A.34V DC
Dielectric withstanding voltage:	500V (rms)
Insulation Resistance:	300MΩ Min. at 500V DC
Leakage resistance:	10,000mΩ

Characteristics



Solder Type
Quick Lock
13 Pin

Substitute Items


Mating Items

D-6002
D-6005
D-6006
D-6007
D-6008

Arrangement of Contacts



FRONT VIEW

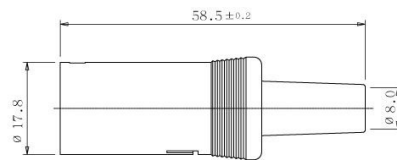

SIDE VIEW

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Jack / 13 Pin

D-6095

DATE

UNIT: mm



1 / 1

A0

A4