



Specifications	
Plastic Body:	PBT D202G15 UL94
Plastic Base:	PBT D202G15 UL94
Contact Terminal:	BSR-H 0.7t C2680 (65/35) Silver PTD
Earth Terminal:	BSR-H 0.25t C5191 (PBP) Nickel
Face Cover:	BSR-H 0.2t C5191 (PBP) Nickel
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 2A Max.


Characteristics
Solder Type
PCB Mount
5 Pin

Substitute Items
D-6096

Mating Items
D-6001

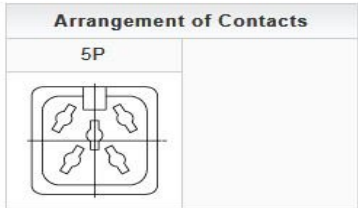

FRONT VIEW



SIDE VIEW

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Socket / 5 Pin

D-6097

DATE

UNIT: mm



1 / 1

A0

A4