





Specifications	
Plastic Core:	Nylon 101F NC010 UL94V2
Contact Terminal:	BSR-H 0.2t C5191 (PBP) Silver PTD
Cover:	BSR-H 0.5t C2680 (65/35) Nickel
Plastic Body:	Nylon 101F NC010 UL94V2
Dielectric Strength:	250V AC / 1 Minute
Insulation Resistance:	50MΩ Min. at 250V DC
Rating:	12V DC 2A Max.


Characteristics
Solder Type
Straight Type
13 Pin

Substitute Items

Mating Items
D-6004

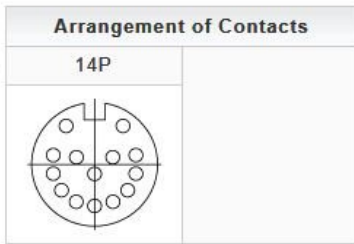

FRONT VIEW

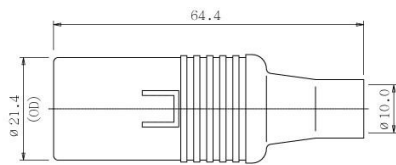

SIDE VIEW

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

Multi-Pole Jack / 13 Pin

D-6098

DATE

UNIT: mm



1 / 1

A0

A4