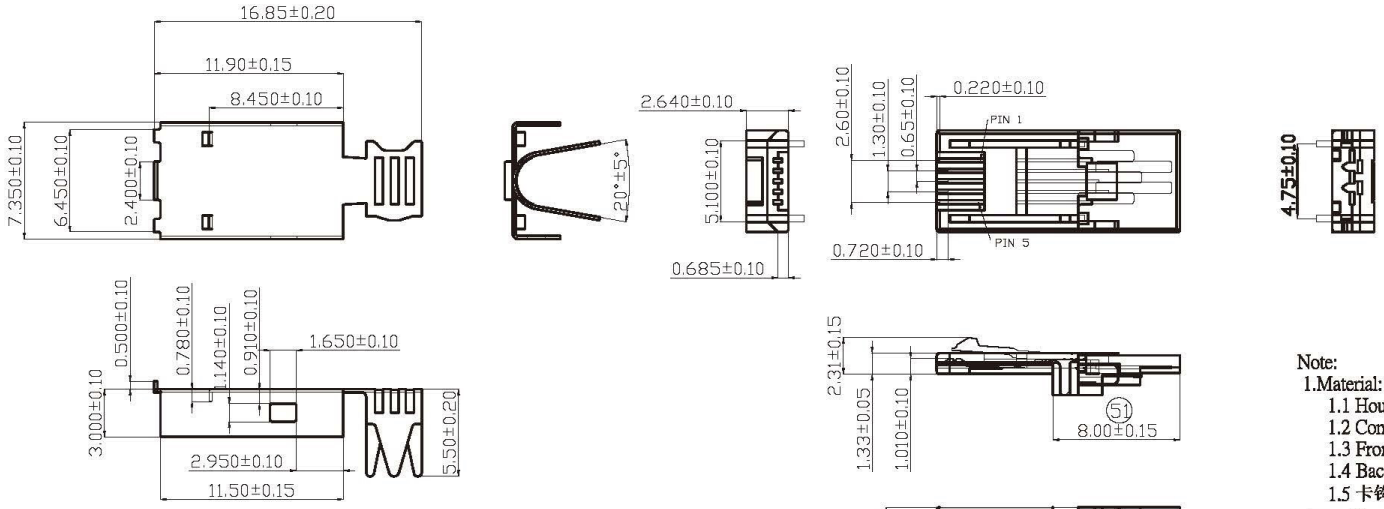


BACK SHELL

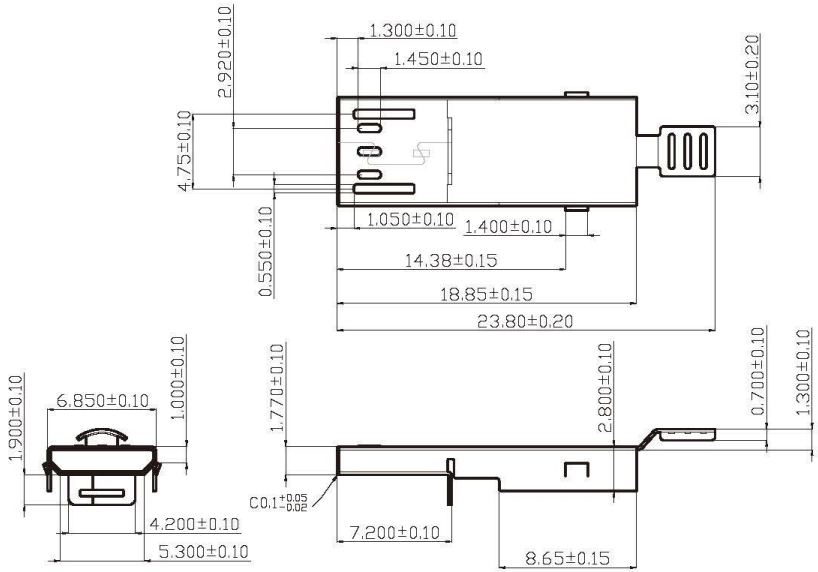


FRONT SHELL

Note:

1.Material:

1.1 Housing: LCP UL 94-V0 rated.
1.2 Contact: Phosphor Bronze, t=0.20mm.
1.3 Front Shell: Stainless steel, t=0.20mm.
1.4 Back Shell: Stainless steel, t=0.20mm.
1.5 卡钩 : Stainless steel, t=0.40mm.

2.specification:

2.1 Current rating:1A MAX.
2.2 Dielectric withstanding voltage:500 v(ac) far minuta.
2.3 Contact resistance: 30 mΩ max.
2.4 Insulation resistance: 1000 MΩ min at DC 500V.
2.5 Temperature range: -55℃~+105℃.

3.Finishes:

3.1 Contacts: Gold flashed, 1u",3u",5u",15u", 30u".on Contact area .
100u-120u" Tin. Plating on soldertails.
50u"-80u" Nickel .underplating over all

| No. | Part Name | Q'ty | Material | Thickness | Finish |
|---|---|---|---|---|---|
| 3 | 卡勾 | 2 | Stainless steel | T=0.40±0.01mm | |
| 5 | BACK SHELL | 1 | Stainless steel | T=0.20±0.01mm | |
| 4 | FRONT SHELL | 1 | Stainless steel | T=0.20±0.01mm | |
| 2 | CONTACT | 5 | Phosphor Bronze | T=0.20±0.01mm | Gold flashed |
| 1 | HOUSING | 2 | LCP | | Black |

RoHS Compliant


All Connectors
www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany
info@allconnectors.de
Fax: 0049 711 7009504
Kettemerstr. 25


| | |
|---|---|
| DRAWING BY CY | |
| CHECKED BY GENIUS | |
| UNIT / mm | SCALE 1 : 1 |
| DATE | |
| SIZE A4 | PPOJECTION |

TOLERANCES ARE
X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



ORDER INFORMATION

MISB-PS-5B-LF
SERIES
MALE
SOLDER
5 PIN B TYPE
LEADFREE

DESCRIPTION: MICRO USB 5P B MALE SOLDER