
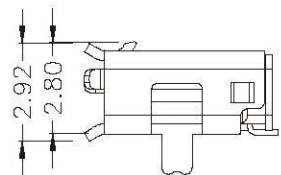


P.B.C LAYOUT
TOP VIEW ±0.05

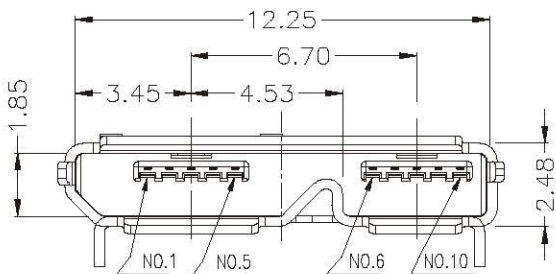


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

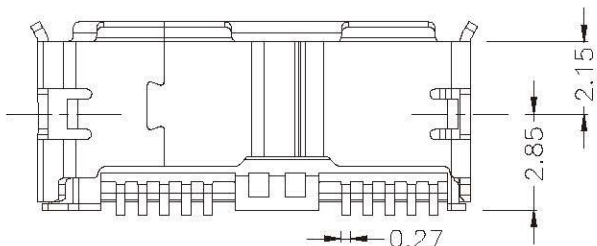


RoHS Compliant

www.allconnectors.de
Tel.: 0049 711 7009503
70754 Filderstadt - Germany

Info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

DRAWING BY CY		TOLERANCES ARE X ± XX ± XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/ mm	SCALE 1:1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

MISB-SWM-10B-LF

SERIES | LEADFREE
10 PIN B TYPE
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: MICRO USB 3.0 B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE