


This document is the property of Nan-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nan-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	Release	FIBED WENG	19/02/09*	
B	ADD P/N	Enly Suen	10/06/11*	ECN11035
C				

TABLE A

P/N	DESCRIPTION	PLATING
OBD2-16M1-33	OBD2 16(M) 鍍式	金15u"/亮鍍60u"
OBD2-16M1-06	OBD2 16(M) 鍍式	亮金/亮鍍60u"
OBD2-16M1-05	OBD2 16(M) 鍍式	金30u"/亮鍍60u"
OBD2-16M1-02	OBD2 16(M) 鍍式	鍍60u"

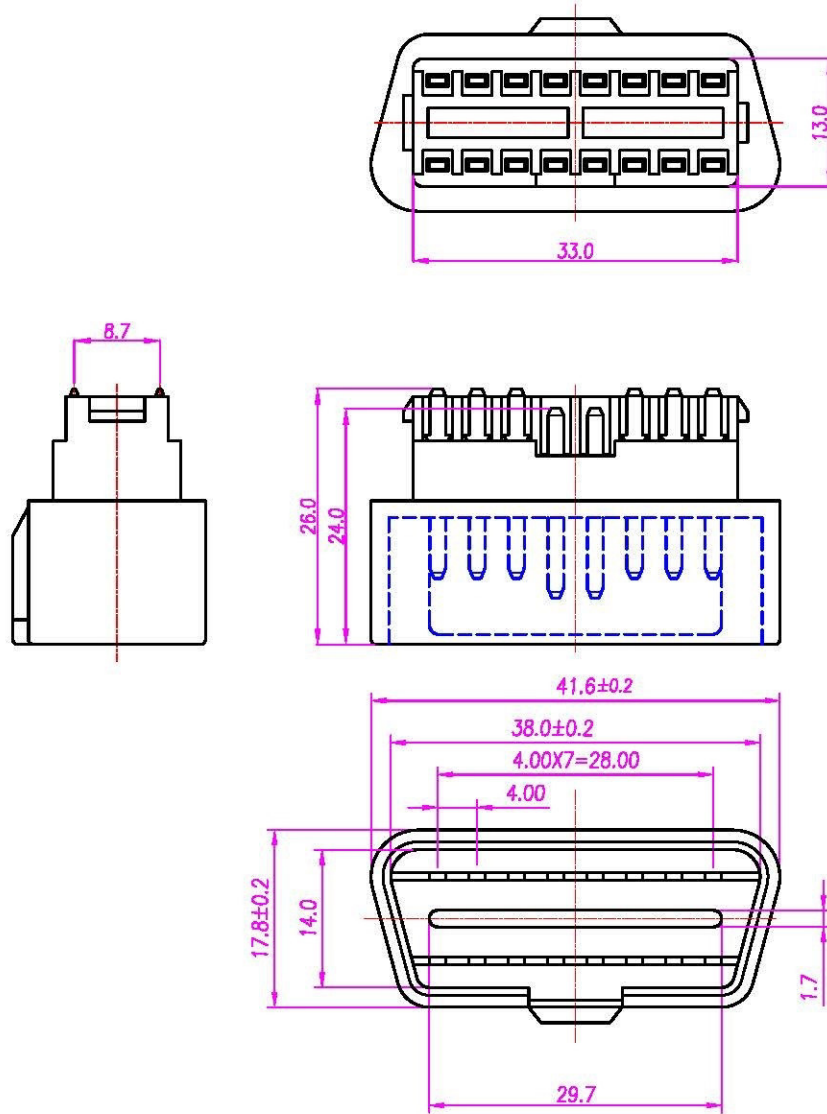

- MATERIAL :
 - HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - CONTACT A : BRASS
- FINISH :
 - CONTACT : TABLE A
 - UNDER PLATE : NICKEL
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Voltage : 30V
- Environmental :
 - Operation Temperature : -40 °C~85°C

DRAW	Yeh Chou	APPVL	Fibo Weng	UNIT	MM	TOLERANCE		TITLE	TABLE A			SHEET	
CHECK	Enly Suen			SCALE	1:1	X ±0.20 XX ±0.10 XXX ±0.05 XXXX ±0.03 ANGULA ±1°		www.allconnectors.de TEL: 0049 711 7003503 30744 Fildedach, Germany	info@allconnectors.de Fax: 0049 711 7005504 Kettnerstr. 25	PART NO.	TABLE A	DWG NO.	QC1256