


This document is the property of Nan-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nan-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	Release	FIBED VENG	18/05/11'	
B				
C				

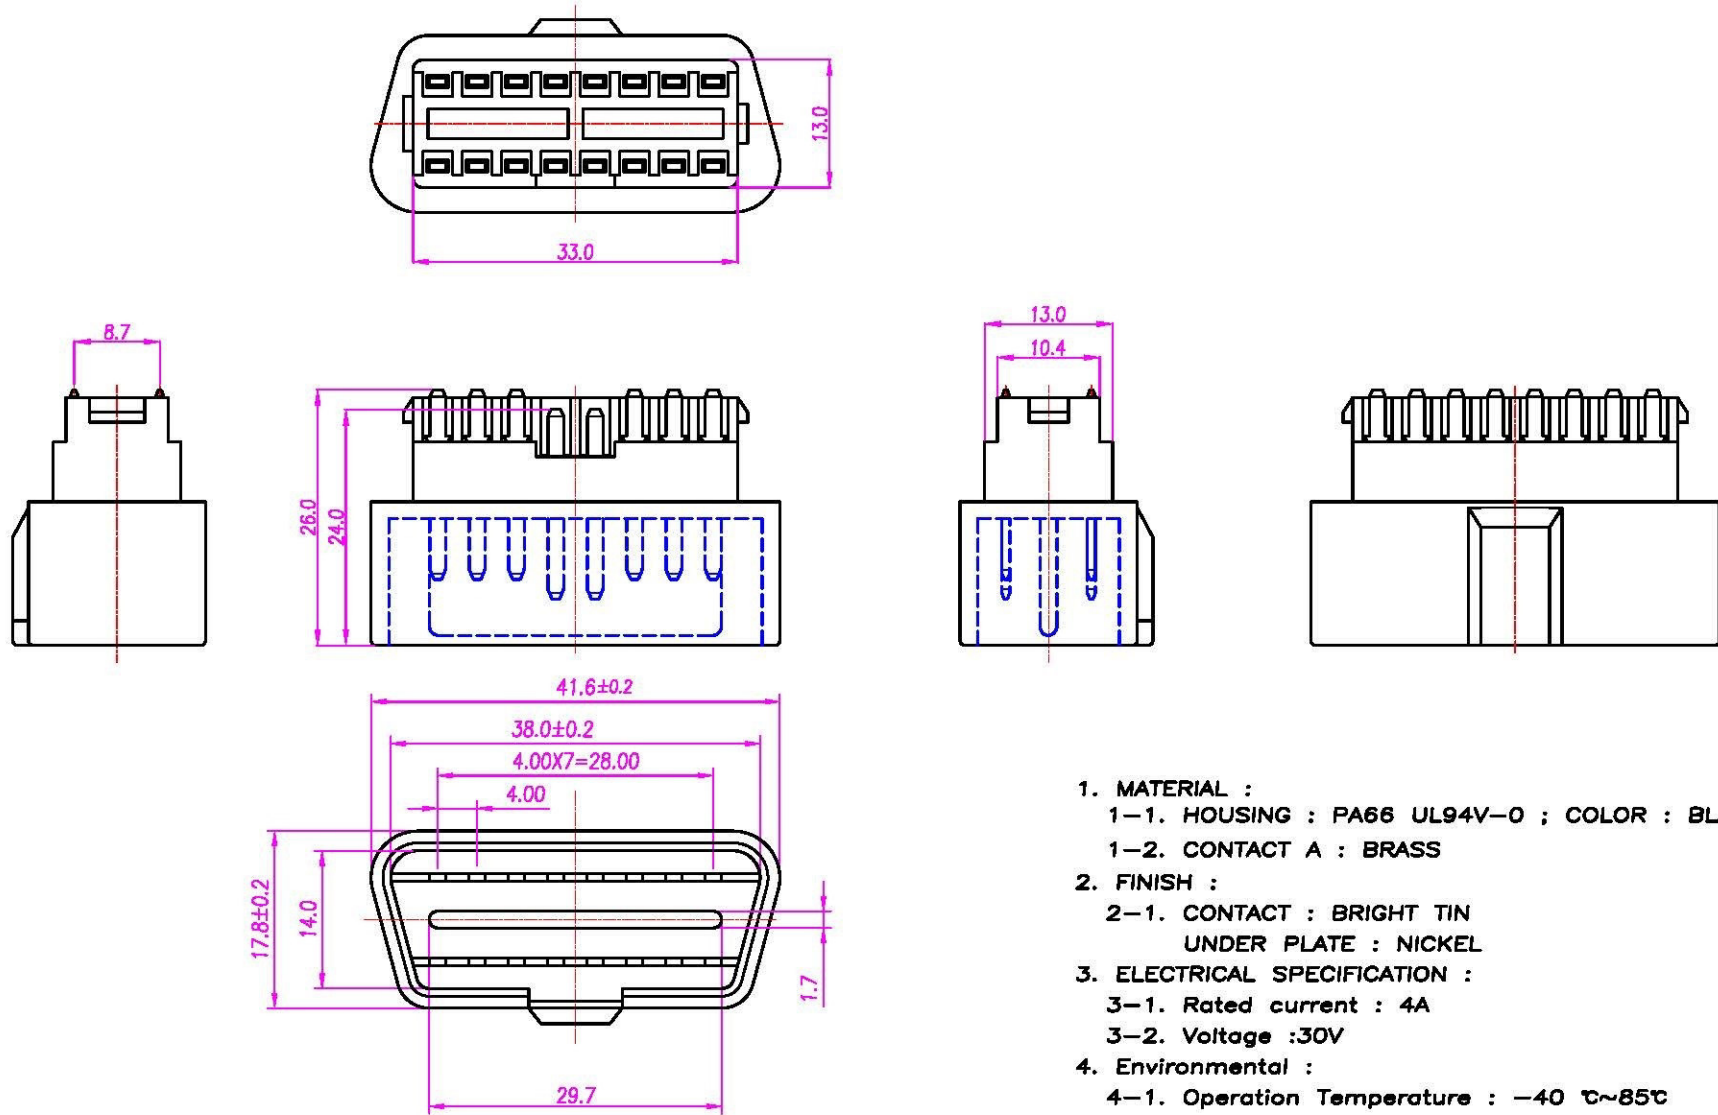

- MATERIAL :
 - HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - CONTACT A : BRASS
- FINISH :
 - CONTACT : BRIGHT TIN
 - UNDER PLATE : NICKEL
- ELECTRICAL SPECIFICATION :
 - Rated current : 4A
 - Voltage : 30V
- Environmental :
 - Operation Temperature : -40 °C~85°C

DRAW	Yeh Chou	APPVL	Fibo Veng	UNIT	MM	TOLERANCE		TITLE	OBD2 16(M) 端子 (防呆连接器)			SHEET	
CHECK	Enly Sun			SCALE	1:1	X ±0.20 XX ±0.10 XXX ±0.05 XXXX ±0.03 ANGULA ±1°		www.allconnectors.de Tel: 0049 711 7003503 70794 Hildersbach Germany	info@allconnectors.de Fax: 0049 711 7003504 Kettnerstr. 29	PART NO.	OBD2-16M1-32	DWG NO.	QC5342