


B-B' SECTION

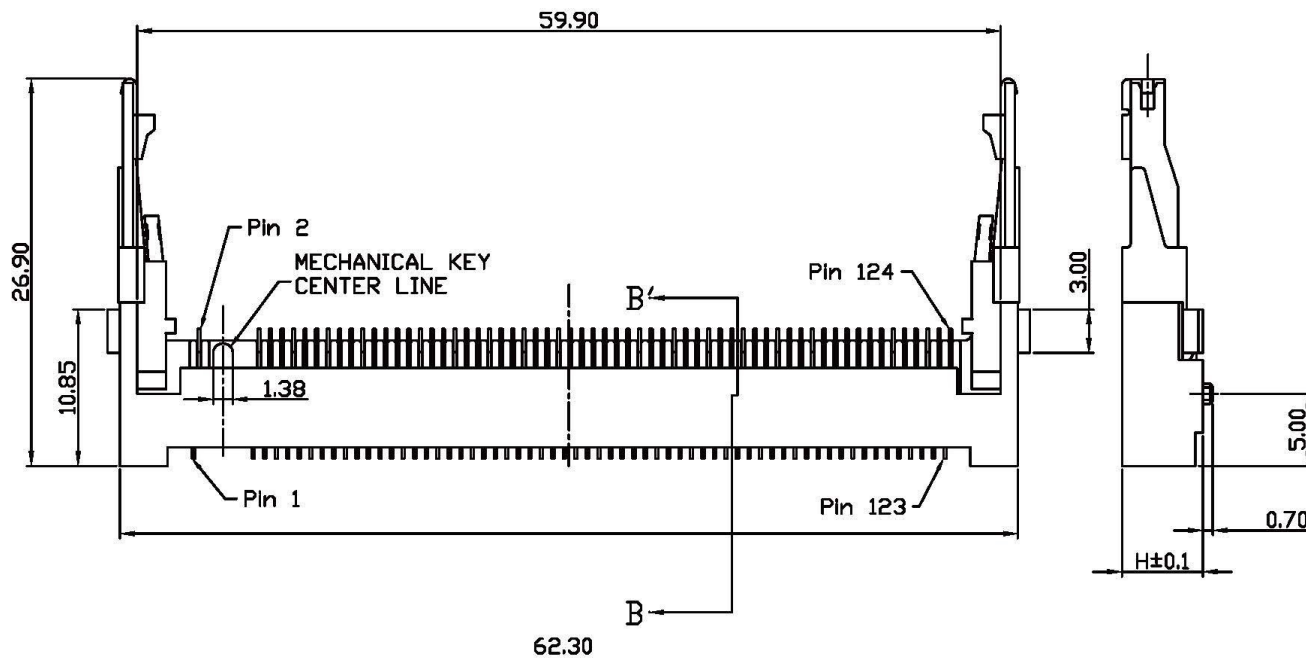

P/N	STAND-OFF (mm)			PACKING	
	H	A	B	TRAY	REEL
MPCI-W52-124	5.2	2.74	0.1	✓	
MPCI-W52R-124					✓
MPCI-W56-124	5.6	3.14	0.5	✓	
MPCI-W56R-124					✓
MPCI-W60-124	6.0	3.54	0.9	✓	
MPCI-W60R-124					✓
MPCI-W68-124	6.8	4.34	1.7	✓	
MPCI-W68R-124					✓

- NOTES:
- MATERIAL:
 - 1-1 HOUSING : HIGH TEMPERATURE THERMOPLASTIC UL94V-0, BLACK
 - 1-2 CONTACT : COPPER ALLOY
 - 1-3 SOLDER TAB & LATCH: COPPER ALLOY
 - FINISH:
 - 2-1 CONTACT AREA: GOLD FLASH OVER 40u" MIN. Ni UNDER PLATED OVERALL
 - 2-2 SOLDERING TAB: GOLD PLATING OVER Ni
 - LAYOUT DWG. No. : P-AKE-1
 - GENERAL TOLERANCE :±0.2

RoHS Compliant

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

DRAWING BY CY
CHECKED BY GENIUS
UNIT/mm SCALE 1:1
DATE
SIZE A4

TOLERANCES ARE
X ±
X ± 0.20
.XX ± 0.10
XXX ±
ANG ±

PJECTION



ORDER INFORMATION

MPCI-Wxx-124-LF

SERIES 52: 5.2mm 56: 5.6mm 60: 6.0mm 68: 6.8mm

124WAY LEADFREE

90°SMT

DESCRIPTION: Mini PCI Connector ,0.8mm Pitch
124 Pin 5.2/5.6/6.0/6.8mm Height

