


This document is the property of Nian-Yeong Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Nian-Yeong Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	Fido Veng	22/12/08	
B				
C				

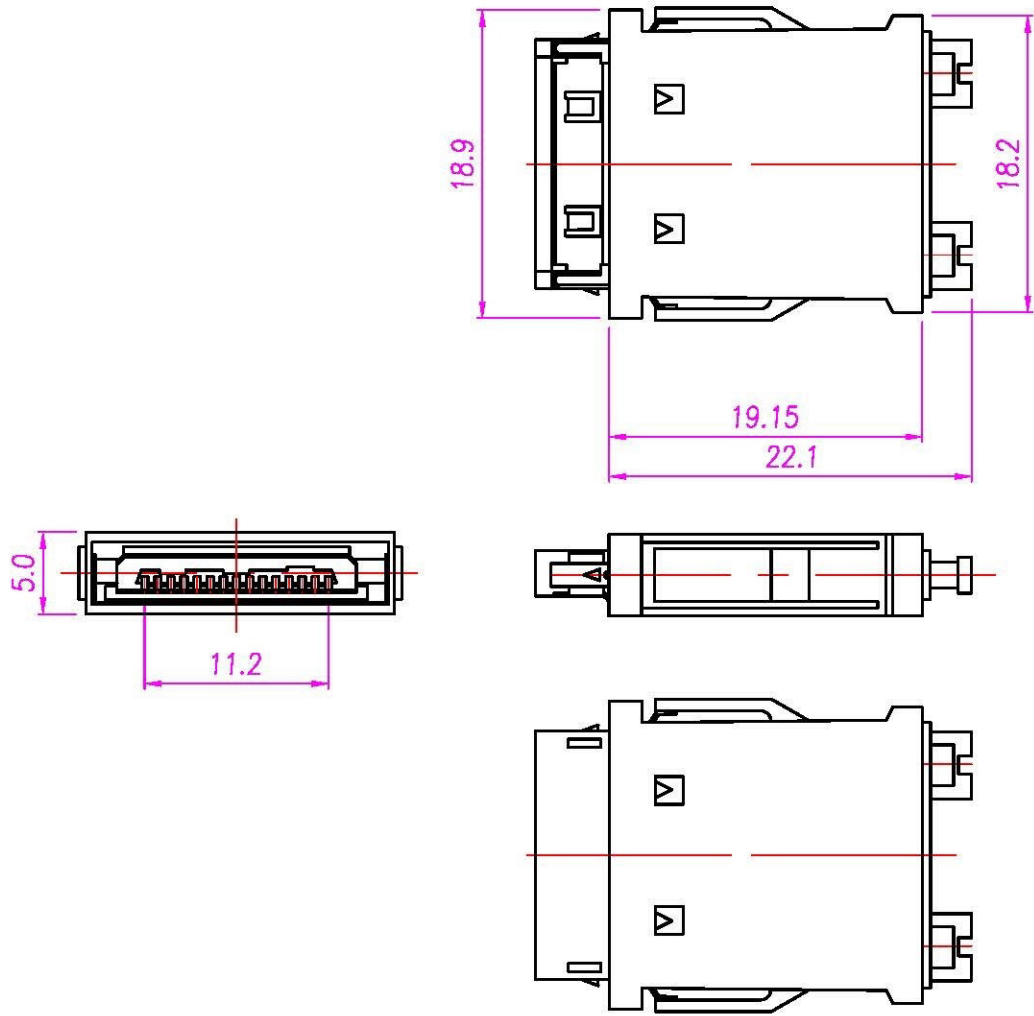

備註 / NOTE:

- 安規 / SAFETY:
 - 規格 / RATING: 100V AC MAX or 12V DC 2A MAX
 - 絕緣阻抗 / INSULATION RESISTANCE: 50M ohm MIN at 250V DC
 - 絕緣耐壓 / DIELECTRIC WITHSTANDING VOLTAGE: 250V AC at 1 MIN
- 材質 / MATERIAL:
 - 膠芯 / HOUSING: NYLON 46, BLACK, GF UL94-V0
 - 固定座 / INSERT: P.B.T.+30%GF, BLACK, GF UL94-V0
 - 端子 / CONTACT: PHOSPHOR BRONZE
 - 上蓋 / METAL TOP SHELL: 不銹鋼 / STAINLESS STEEL
 - 下蓋 / METAL BOTT SHELL: 不銹鋼 / STAINLESS STEEL
 - 外套 NYLON 66, (15% G/F), GF UL94-V0, BLACK

3. 電鍍 / PLATING:

端子 / CONTACT:
 UNDER-PLATE 50u" MIN NICKEL ALL OVER,
 PLATE 150u" MIN TIN/LEAD IN TAIL ZONE,
 PLATE 5u" MIN GOLD OVER 30u" MIN Pd/Ni
 IN CONTACT AREA.

DRAW	Enly Suen	APPVL	Fido Veng	UNIT	mm	TOLERANCE					TITLE	PCMCIA 15P 母座 (HD) -A23 (SR MOLDING) 產品			SHEET				
CHECK	Enly Suen	SCALE	1:1	XX	±0.20	XX					±0.10	XXX	±0.05	XXXX	±0.03		ANGULA	±1°	PART NO.

Allconnectors

www.allconnectors.com.cn
 Tel: 0049 711 7009573
 78734 Hilderstadt - Germany

info@allconnectors.com
 Fax: 0049 711 7005504
 Kettnerstr. 25