
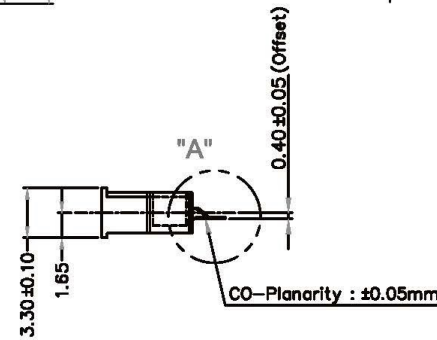


Recommend PCB Layout

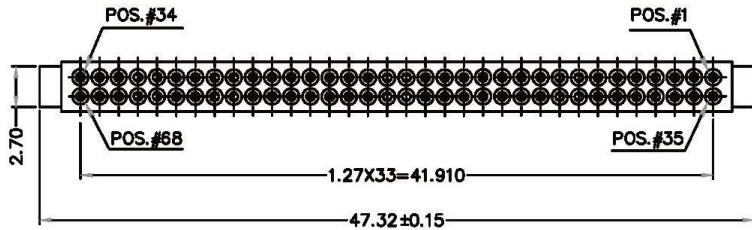

Note

1. Material:

Contact- Copper Alloy
 Grounding Plate- Copper Alloy
 Housing- High Temp Thermoplastic
 LCP (UL 94V-0)

2. Plating:

Underplate : 30u" (0.76um) Nickel
 Solder Tails : 100u" (2.54um) Tin


3. Electrical:

Current Rating : 0.5A
 Insulation Resistance : $>1 \times 10^9$ ohm at 500 Vdc
 $>1 \times 10^8$ ohm at 500 Vdc
 after Environmental Conditioning

Withstanding Voltage : 500 Vrms at Sea Level

4. Environmental:

Temperature Rating : -10°C to +70°C



DETAIL "A"
S=5:1



All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25


RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT/ mm SCALE 1 : 1
 DATE
 SIZE A4


TOLERANCES ARE

X ±
 X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

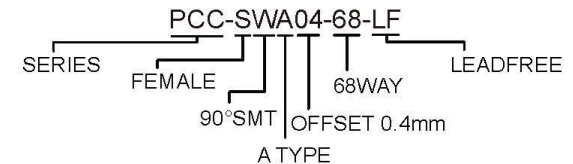

DESCRIPTION: PC Card 68 pin connect