
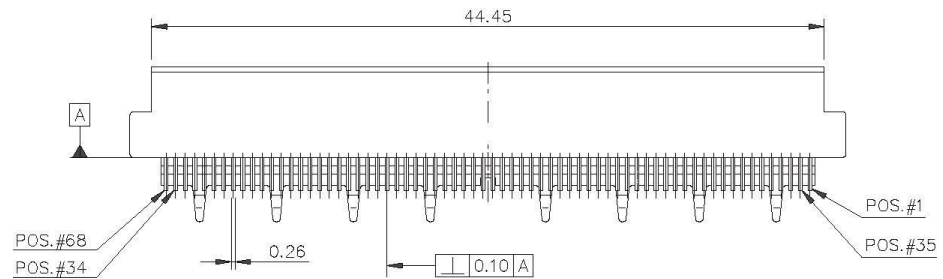


RECOMMENDED PCB LAYOUT

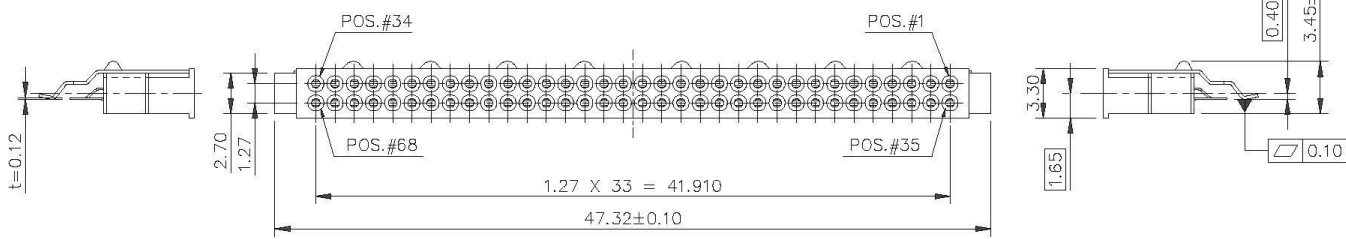


- Note
- Material:
 - Contact—Copper Alloy
 - Grounding Plate—Copper Alloy
 - Housing— High Temp Thermoplastic (UL 94V-0)
 - Plating:
 - Underplate : 30u"(0.76um) Nickel
 - Solder Tails : 100u"(2.54um)/ Tin (Lead free)
 - Electrical:
 - Current Rating : 0.5A
 - Insulation Resistance : >1x10⁹ ohm at 500 Vdc
 - >1x10⁸ ohm at 500 Vdc after Enviromental Conditioning
 - Withstanding Voltage : 500 Vrms at Sea Level
 - Enviromental:
 - Temperature Rating : -10°C to +70°C

Allconnectors


www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant

DRAWING BY CY		TOLERANCES ARE X ± X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/ mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

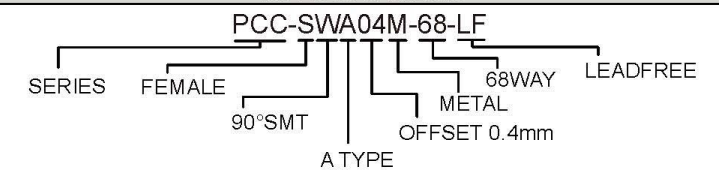

DESCRIPTION: