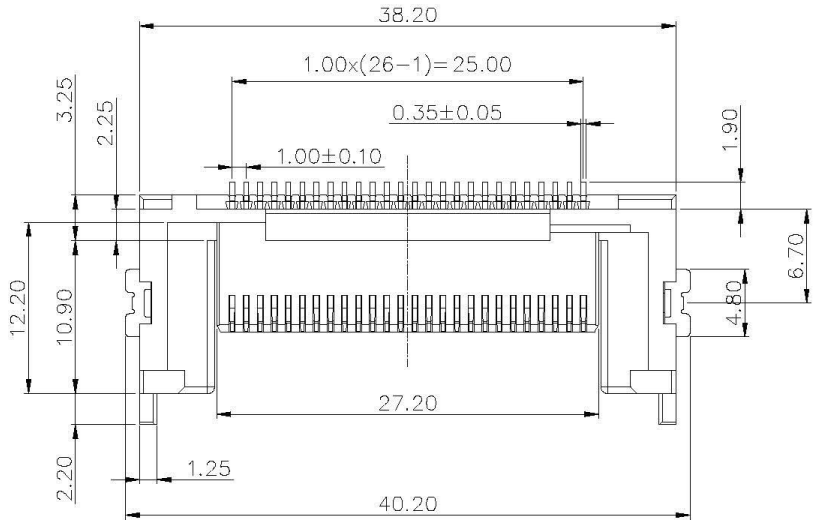



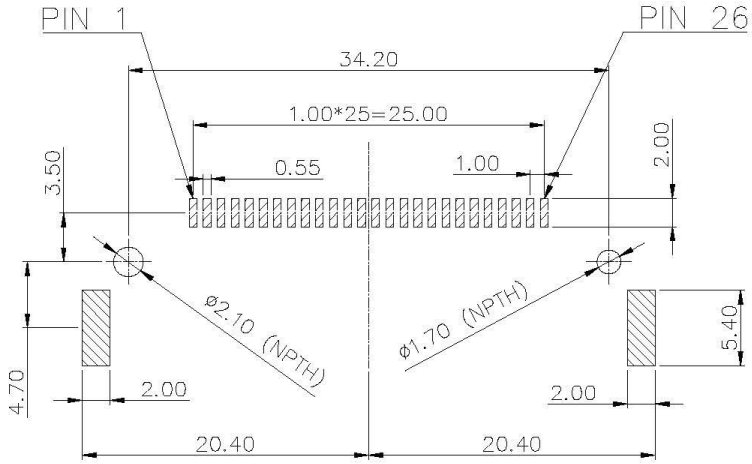

RECOMENDED PCB LAYOUT

TOLERANCE: ±0.05mm(TOP VIEW)

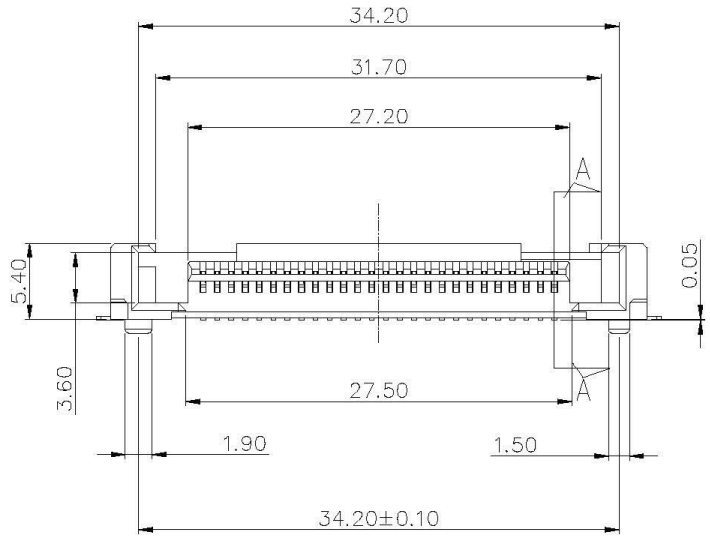

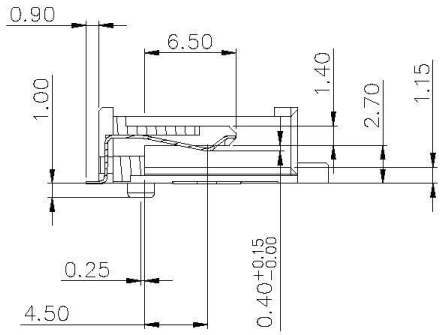

SECTION A−A

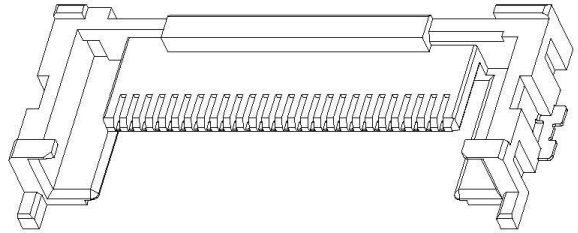

NOTE:

1)Material:
- −Housing: Engineering Plastic, LCP With 30% G.F. UL 94V−0 RATED
- −Contact: Copper Alloy
- −Hold−Down: Copper Alloy

2)Plating:
- −Contact:
  - •Underplating: 1.27μm(50u") min. Nickel overall.
  - •Contact Area: Gold Plating Over 1.27μm(50u") Nickel underplate.
  - •Solder Tail: 2.54μm(100u") min. Tin Over Ni underplate.
- −Hold−Down: 2.54μm(100u") min. Tin over 1.27μm(50u") min. Ni underplate overall

RoHS Compliant

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettemerstr. 25

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

ORDER INFORMATION

PCE-PWP-26-LF

- SERIES
- MALE / 90°SMT / POST
- 26WAY
- LEADFREE

DESCRIPTION: