
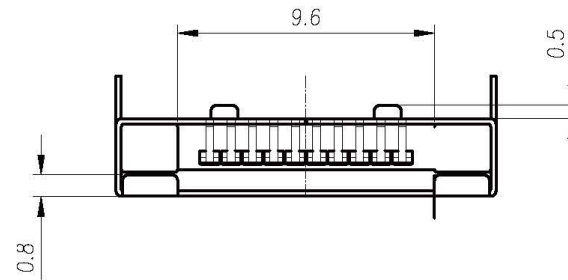


Recommend P.C.B Layout

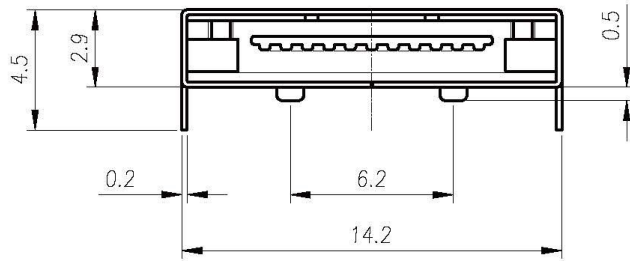

備註 / NOTE

1. 安規 / SAFETY :

- 1-1. 規格 / RATING : 100V AC MAX OR 12V DC 2A MAX
- 1-2. 絕緣阻抗 / INSULATION RESISTANCE : 100M MIN AT 500 DC
- 1-3. 絕緣耐壓 / DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC AT 1 MINUTE

2. 材質 / MATERIAL :

- 2-1. 鐵殼 / SHELL : 不銹鋼 / STAINLESS
- 2-2. 膠芯 / HOUSING : LCP
- 2-3. 端子 / PIN : 磷銅 / PHOSPHOR BRONZE

3. 電鍍 / PLATING :

- 3-1. 端子 / PIN : 鍍金 10u" / TIN, GOLD 10u"

RoHS Compliant

TOLERANCES ARE

All Connectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4 PROJECTION

X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

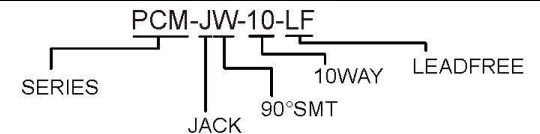

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

DESCRIPTION: PCMCIA 10PIN 母座成品