

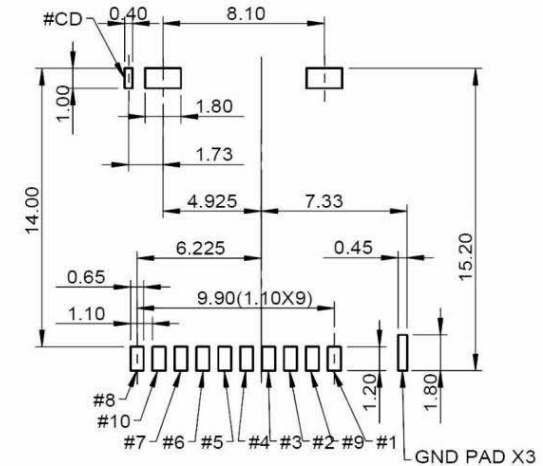


NOTES:
 1. MATERIAL:
 INSULATOR: HIGH TEMPERATURE THERMOPLASTIC,
 UL94V-0, BLACK
 CONTACT: PHOSPHOR BRONZE



PCB LAYOUT

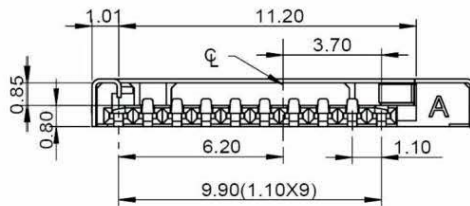

Pin Assignment:	
#1	DTA2
#2	DAT3
#3	CMD
#4	VDD
#5	CLK
#6	VSS
#7	DAT0
#8	DAT1 ²
#9	RFIO4
#10	RFIO4
#CD	CD

CIRCUIT:



RoHS Compliant

TOLERANCES ARE

Allconnectors

DRAWING BY CY


CHECKED BY GENIUS

UNIT/ mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

TFC-WPCEB-08-LF
 SERIES | | | | LEADFREE
 90°SMT | | | | 08WAY
 PUSH PUSH | | | | SWITCH OPEN
 EAR
 C/LAYOHT

DESCRIPTION: microSD A&B Type & T-Flash Push-Push Connector

www.allconnectors.de
 info@allconnectors.de
 Tel: 0049 711 4005043
 Fax: 0049 711 7005041
 70794 Filzschluff - Germany
 Kollmerschstr. 23