
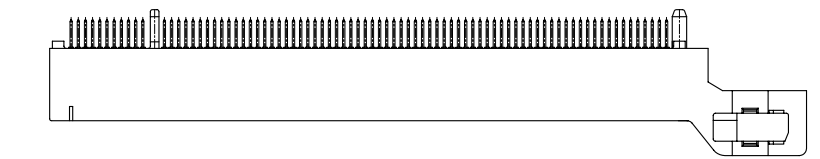
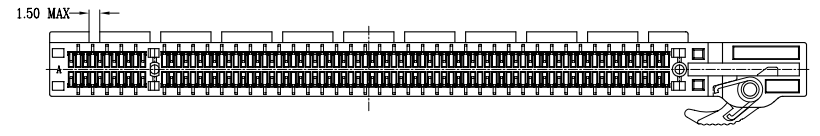

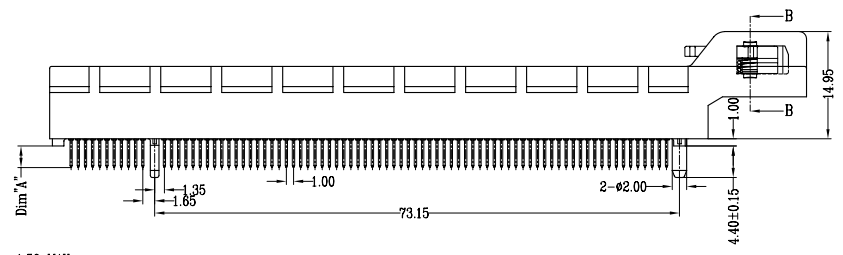



REV.	ECN.NO.	DATE
A	RELEASED	12/22/08

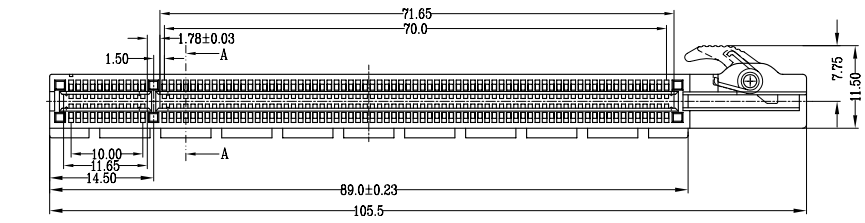

Part NO.	Dim "A"
WPCS-164AN49B28UWR	2.50mm
WPCS-164AN49B38UWR	3.00mm

NOTES:
*Material

Body: Nylon46,UL 94V-0 Rated.
Plastic Ear: Nylon66,UL 94V-0 Rated. Color: Black.
Spring: 65Mn.
Contacts: Brass
Plating: Gold plating over Nickel on contact area; Tin plating on Solder Tail.




*Mechanical:

Insertion Force: 1.15N max per contact pair;
Withdrawal Force: 0.15N min per contact pair;
Contact Retention Force: 4.9N min per contact;

*Electrical Specification

Contact Resistance : 30 Milliohms Max.
Current Resistance : 1.1 Ampere
Insulation Resistance : 1000 Megohms Min, At 500V AC.
Operating Temperature : -55°C to +105°C

*How to order:

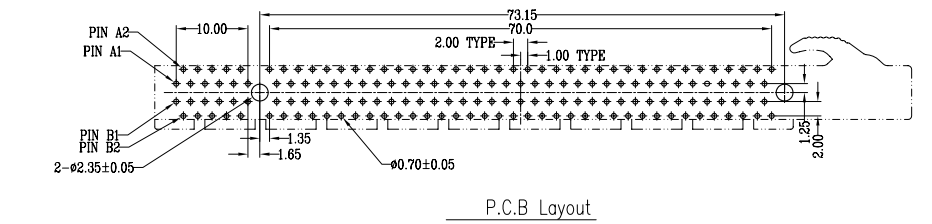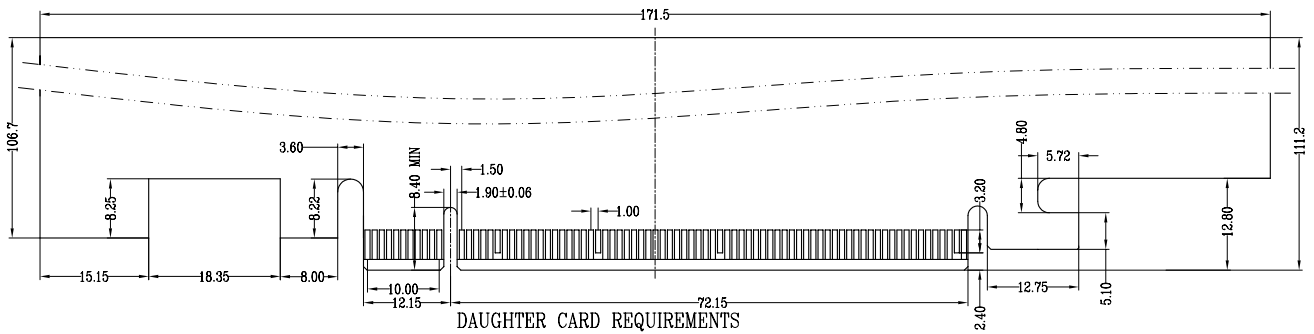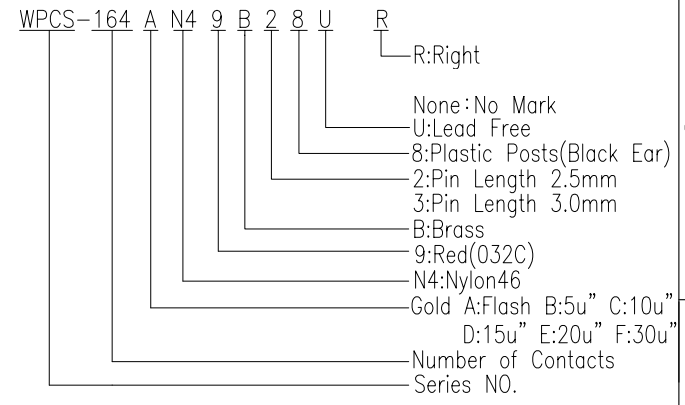

REV		Units		Scale		Drawing By		Date	
		mm		1:1		L W		12/22/08	
Tolerance Unless Otherwise Specified						Reviewed By		Date	
.X		~ ±0.38		ZYZ		12/23/08		Date 12/22/08	
.XX		~ ±0.25		Approval By		Date		Sheet 1 of 1	
.XXX		~ ±0.20		Richard		12/30/08		Title	
Angle		~ ± 3°						Third Angle Projection	
								Drawing No.	
								REV A	



www.allconnectors.eu | info@allconnectors.eu
Tel: +49 (0)711 358 110 20 | Fax: +49 (0)711 358 110 25

PCI Express 164 Pin Connector Clamp
Right Side Type(Plastic Posts & Black Ear)