
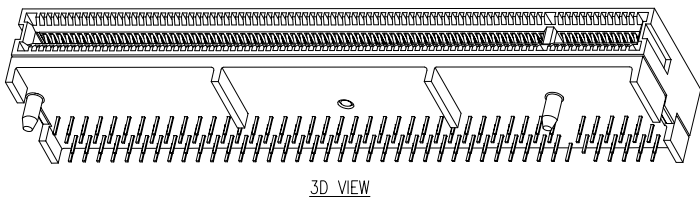
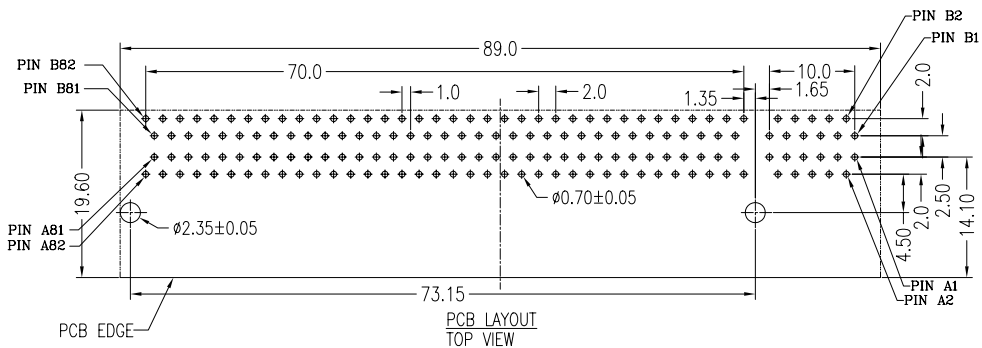
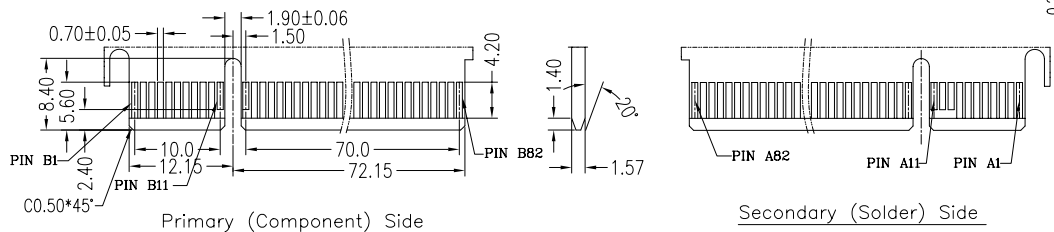
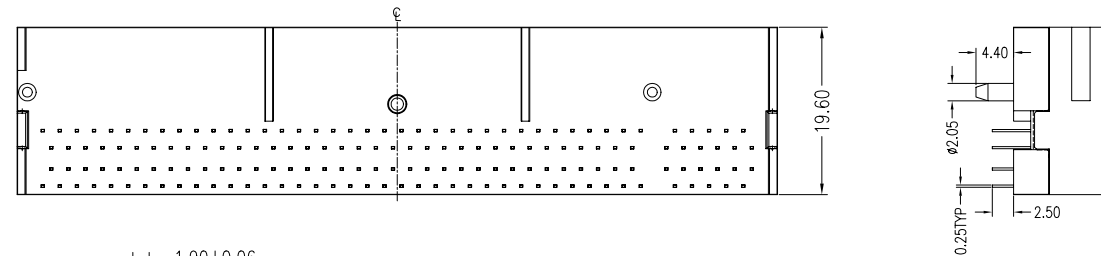


REV.	ECN.NO.	DATE
A	RELEASED	10/15/07

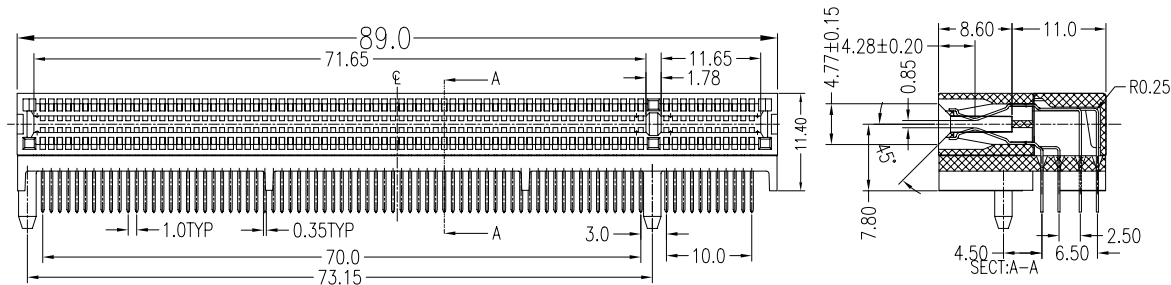

NOTES:

***Material**

Housing: Nylon46+30%G.F, UL 94V-0 Rated. Color: Black.
 Contact: Brass.
 Plating: Gold plating over Nickel on contact Area; Tin plating on solder tail.

***Mechanical**

Insertion Force: 1.15N max per contact pair;
 Withdrawal Force: 0.15N min per contact pair;
 Contact Retention Force: 4.9N min per contact;


***Electrical Specification**


Contact Resistance : 30 Milliohms Max.
 Current Resistance : 1.1 Ampere
 Insulation Resistance : 1000 Megohms Min, At 500V AC.

***Environmental**

Operating Temperature : -55°C to +105°C

***How to Order:**

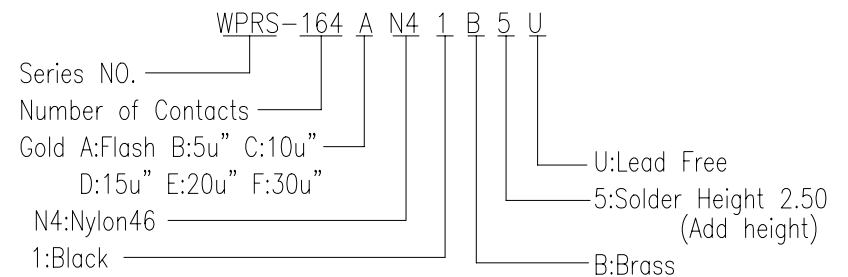

REV	Units		mm	Scale	1.5:1	Drawing By	Data	 <small>www.allconnectors.eu info@allconnectors.eu</small> <small>Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>				
	Tolerance Unless		Otherwise Specified		Wei	10/15/07						
	.X	~ ±0.38		Reviewed By	Roger	Data	Date	10/15/07	Title	PCI Express R/A DIP Type Add Height 164P		
	.XX	~ ±0.25		Approval By	Tf	Data	Sheet	1 of 1				
	.XXX	~ ±0.20				Data	Third Angle Projection					
	Angle	~ ± 3°							Drawing No.	WPRS-164PS-AN-W101	REV	A