


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0 LCP
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

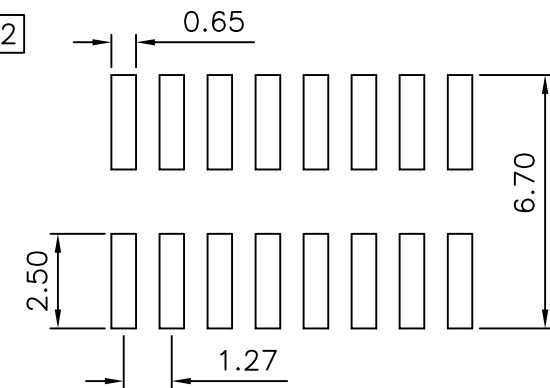

Ordering Information

HMDSV	X	-	XX	XX	XXX	L	B	X	X
Material High	No. of Pins	Standard Plating	Pin Length	Material	Material	POST	Packing		
1=1.0MM 2=2.0MM	Per Row	01=Gold Flash	001=4.0/1.0/2.5/5.5	L=LCP	B=Brass	P=With Post	T=Tube		
3=3.0MM 4=2.54MM	02-40	02=Gold 3U"	XXX>Select A/H1/H2/W	T=6T	P=Phosphoric	W=Without	TP=Tape+Reel		
5=1.5MM 6=1.7MM		11=Tin			Bronze	Post			
7=1.7MM 8=2.5MM		XX>Select Plating			R=Round pin				

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ±	X' ±5°	Andy2005.08.12	
.X ±0.38	.X' ±2°	CHECK	DATE
.XX ±0.25	.XX' ±1°		
.XXX ±0.13	.XXX' ±0.5°	APPRO.	DATE
UNIT:mm	SCALE 1:1		
A4	SHEET: 1 of 1		

 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	1.27 Header SMT TYPE
PART NO (料号)	HMDSVX-XXXXXXLB
DRAWING NO.(图号)	HMDSVX-01
	REV.A0