


Recommended P.C.Board
Hole Layout

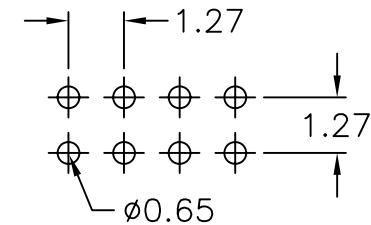

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: BRASS
 Insulation Material: Polyester, UL 94V-0
 LCP

All materials must be GP materials

Ordering Information

HMIDS X - XX XX XXX L B

Material High 1=1.0MM 2=2.0MM 3=3.0MM 4=2.54MM 5=1.5MM 6=1.7MM 7=1.7MM 8=2.5MM


No. of Pins Per Row 02-40

Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating

Pin Length A=4.0 B=2.8 XXX=Select A/B

Material L=LCP T=NL6T

Material B=Brass P=Phosphoric Bronze R=Round pin

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± .X .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	1.27 Header Dip Type
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMIDSX-XXXXXXLB
			DRAWING NO.(图号)	HMIDSX-01
				REV.A0