


Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

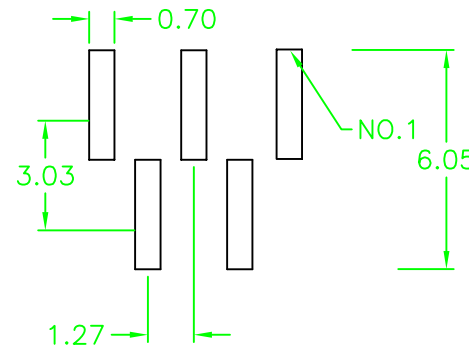

TYPE A=SVA

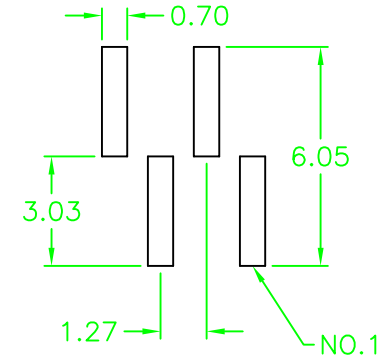

TYPE B=SVB

Ordering Information

HMISSVXH	-	XX	XX	XXX	L	B	X	X
No. of Pins Per Row	Standard Plating	Pin Length	Material	Material	POST	Packing		
02=40	01=Gold Flash 02=Gold 3U 11=Tin XX=Select Plating	001=4.0/4.0/5.5 XXX>Select A/H/W	L=LCP T=6T	B=Brass P=Phosphoric Bronze R=Round pin	P=With Post W=Without Post	TR=Tape+Reel T=Tube		

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	All Connectors	
X. ±0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12	www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	1.27MM Header SMT TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMISSVXH-XXXXXXX
			DRAWING NO.(图号)	HMISSVXH-06
			REV.	AO