

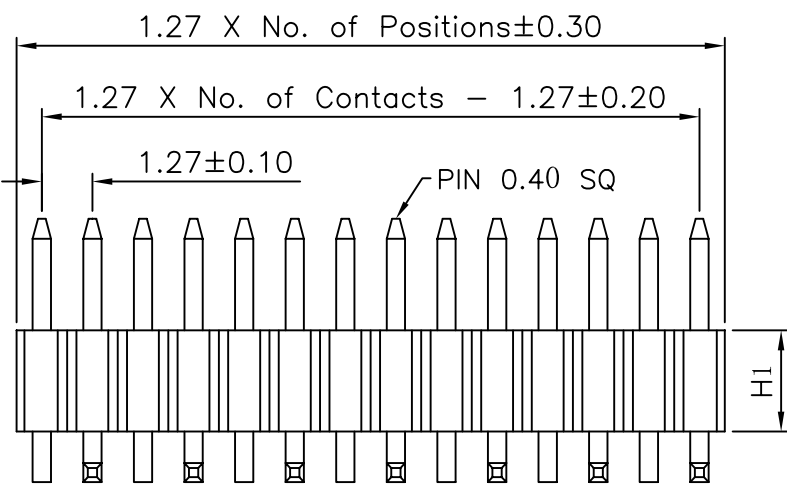


Specifications
 Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

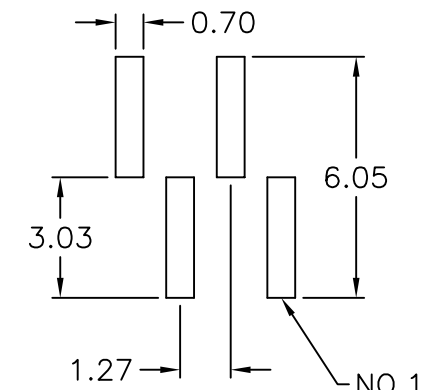

RECOMMENDED P.C.B LAYOUT

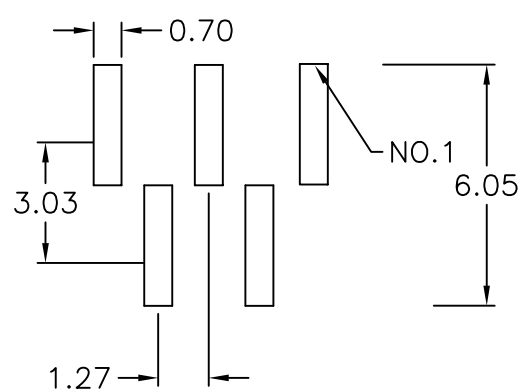

Ordering Information

HMISSVX	X	-	XX	XX	XXX	T	B	X
Material	High	No. of Pins	Standard Plating	Pin Length	Material	Material	Material	Packing
1=1.0MM	2=2.0MM	Per Row	01=Gold Flash	001=A=4, 0/1.5/4, 0/5.8	L=LCP	B=Brass	P=Phosphoric	TR=Tape+Reel
3=3.0MM	4=2.54MM	02-40	02=Gold 3U"	XXX>Select A/H1/H2/B	T=NL6T	R=Round pin		T=Tube
5=1.5MM	6=1.7MM		11=Fin					
7=1.7MM	8=2.5MM		XX>Select Plating					

TYPE A=SVA

TYPE A=SVB

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
		Andy2005.08.12		
X. ±	X'. ±5'	CHECK	DATE	
.X ±0.38	.X' ±2'			
.XX ±0.25	.XX' ±1'			
.XXX ±0.13	.XXX' ±0.5'			
UNIT:mm	SCALE 1:1	APPRO.	DATE	
A4	SHEET: 1 of 1			
FILE NAME (品名)		1.27MM Header SMT TYPE		
PART NO (料号)		HMISSVXX-XXXXXXXXLBX		
DRAWING NO.(图号)		HMISSVXX-05		REV.AO