

Specifications

Current Rating: 1Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 300V AC/DC

Contact Resistance: 20mΩ Max.



Operating Temperature: -40°C to +105°C

Materials


Contact Material: Brass

Insulation Material: Polyester, UL 94V-0
LCP

All materials must be GP materials

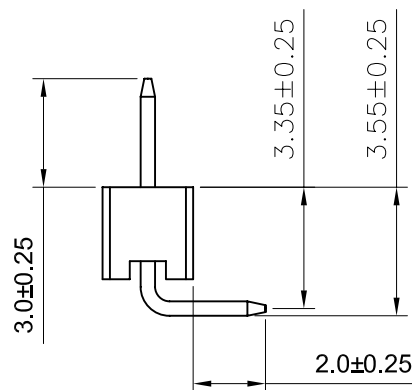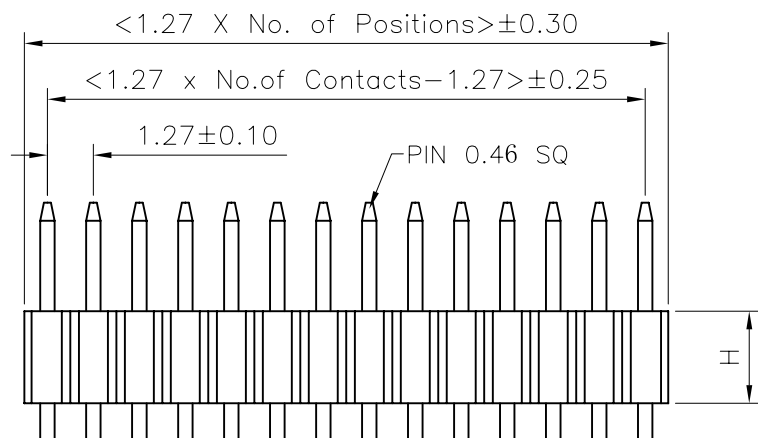

Recommended P.C.Board
Hole Layout
(Tolerance:±0.05)

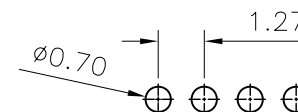

Ordering Information

HMJSR	X	-	XX	XX	XXX	L	B
Material High	No. of Pins	Standard Plating	Pin Length	Material	Material		
1=1.0MM 2=2.0MM	Per Row	01=Gold Flash	001=4.0/3.55/2.8	L=LCP	B=Brass		
3=3.0MM 4=2.54MM	02-40	02=Gold 3U"	XXX=Select A/R/B	T=NL6T	P=Phosphoric Bronze		
5=1.5MM 6=1.7MM		11=Tin			R=Round pin		
7=1.7MM 8=2.5MM		XX=Select Plating					

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ±0.38	X' ±5°	Andy	2005.08.12
.XX ±0.25	.X' ±2°	CHECK	DATE
.XXX ±0.13	.XX' ±1°		
	.XXX' ±0.5°	APPRO.	DATE
UNIT:mm	SCALE 1:1		
A4	SHEET: 1 of 1		

All Connectors www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	1.27MM Header R/A TYPE
PART NO (料号)	HMJSRX-XXXXXXXLB
DRAWING NO.(图号)	HMJSRX-05
	REV.A0