

Recommended P.C.B Layout

MATERIAL

Insulator : NYLON 46
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

POLES	DIM E	POLES	DIM E
		18	21.59
2	1.27	19	22.86
3	2.54	20	24.13
4	3.81	21	25.40
5	5.08	22	26.67
6	6.35	23	27.94
7	7.62	24	29.21
8	8.89	25	30.48
9	10.16	26	31.75
10	11.43	27	33.02
11	12.70	28	34.29
12	13.97	29	35.56
13	15.24	30	36.83
14	16.51	31	38.10
15	17.78	32	39.37
16	19.05	33	40.64
17	20.32		

Allconnectors

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.15


DATE

.XXX ±


ANG ±

SIZE A4

P PROJECTION



ORDER INFORMATION

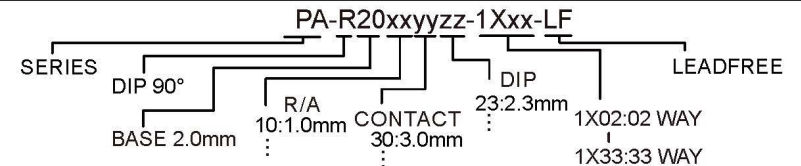

DESCRIPTION: PIN HEADER 1.27*1.27mm RIGHT ANGLE TYPE, SINGLE ROW

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt - Germany

Kettenerstr. 25