
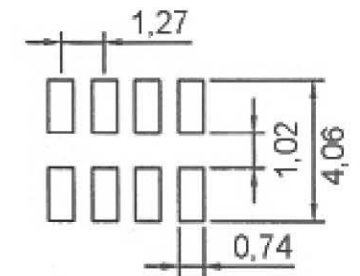
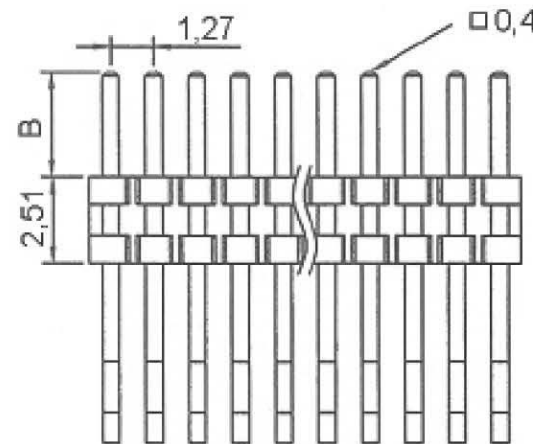
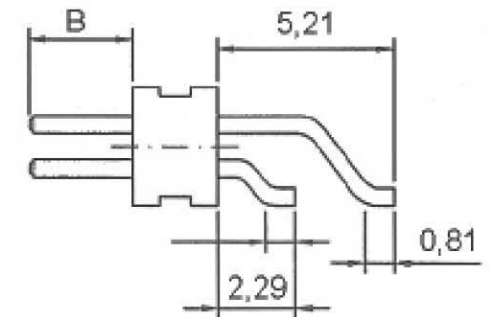


## Technische Daten / Technical Data

Isolierkörper <i>Insulator</i>	Nylon 6T, UL94V0 <i>Nylon 6T, UL94V0</i>
Kontaktmaterial <i>Contact Material</i>	Phosphorbronze <i>Phosphorbronze</i>
Nennstrom <i>Current Rating</i>	1 A
Nennspannung <i>Voltage Rating</i>	500 V <sub>AC</sub>
Durchgangswiderstand <i>Contact Resistance</i>	max. 20 mOhm
Isolationswiderstand <i>Insulation Resistance</i>	5000 MOhm
Temperaturbereich <i>Temperature Range</i>	-40°C ... +105°C

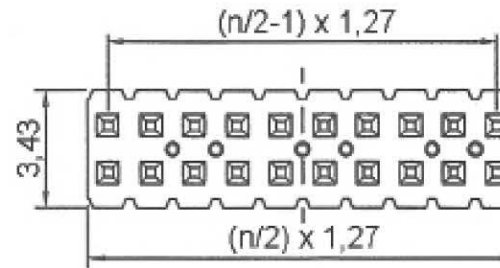

RoHS Compliant

TOLERANCES ARE

**All Connectors**

DRAWING BY CY

X ±

CHECKED BY GENIUS

X ±

UNIT / mm

SCALE 1 : 1

.XX ±

.XXX ±

ANG ±

DATE

SIZE A4

PJECTION

www.allconnectors.de


info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt Germany

Kettnerstr. 25



ORDER INFORMATION

PA-WXxx-2Xxx-LF  
 SERIES | B | LEADFREE  
 2X02:04WAY  
 2X50:100WAY  
 90°SMT | 30:3.0mm  
 NON POST

DESCRIPTION: