


RECOMMENDED P.C.B LAYOUT

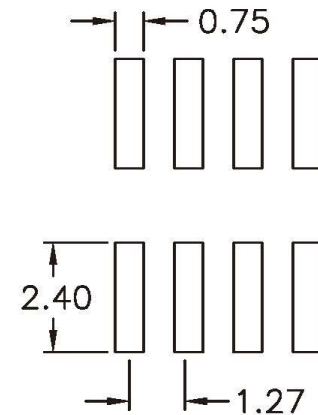

Specifications

Current Rating: 1Amp

Insulation Resistance: 5000Mega ohms Min.

Dielectric Withstanding: 600 VAC min

Contact Resistance: $30m\Omega$ Max.

Operating Temperature: $-55^{\circ}C$ to $+105^{\circ}C$

Materials

Contact Material: Copper Alloy

Insulation Material: Thermoplastic, UL 94V-0

RoHS Compliant

TOLERANCES ARE

All Connectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE


SIZE A4

PROJECTION

X ±
X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG ±



ORDER INFORMATION

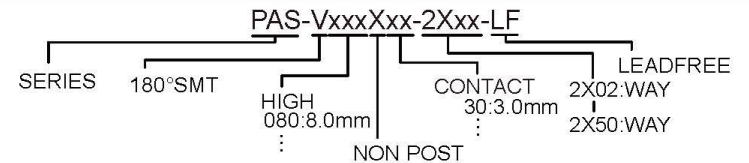

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt - Germany

Kettenerstr. 25