

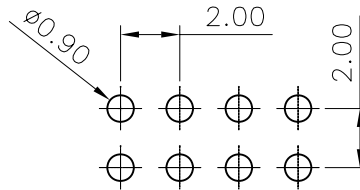


Recommended P.C.B.Layout  
(Tolerance:±0.05)

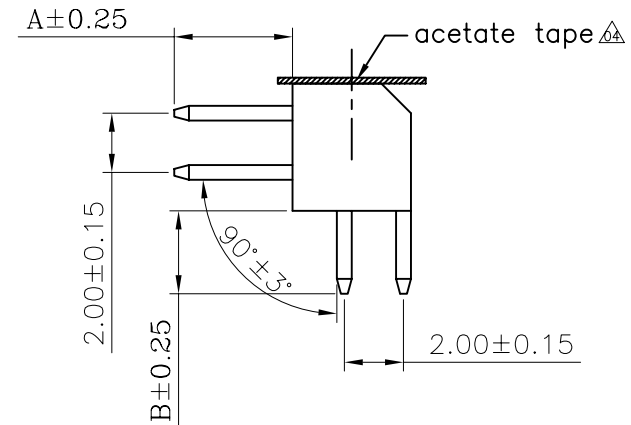

**Specifications**  
 Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature:-40°C to +105°C

**Materials**  
 Contact Material: Brass  
 Insulation Material: Polyester, UL 94V-0  
 Nylon 6T(Processing temp.260°C,10sec)  
 All materials must meet Greenconn  
 requirement for environment protection

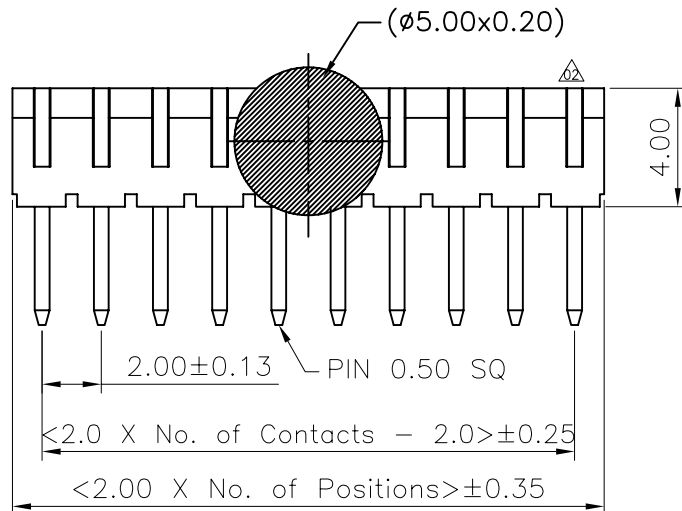

**Ordering Information**

HMLDR 3 - XX XX XXX T B

No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=4.0 /2.8 XXX=Select A/B	Material L=LCP T=NL6T	Material B=Brass P=Phosphoric Bronze
---------------------------------	---	--	-----------------------------	--

GENERAL TOLERANCE X. ± 0.38 .XX ±0.25 .XXX ±0.13	ANGLE TOLERANCE X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	DESIGN DATE Andy2005.08.12	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
		CHECK DATE		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.0MM Header R/A TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HMLDR3-XXXXXXTB
			DRAWING NO.(图号)	HMLDR3-01
				REV.A0