


Recommended P.C.Board

Hole Layout

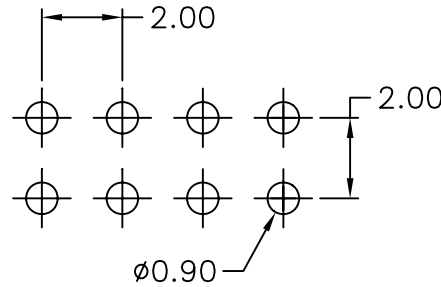


Specifications

Current Rating: 2Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 500V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T  
 All materials must be GP materials

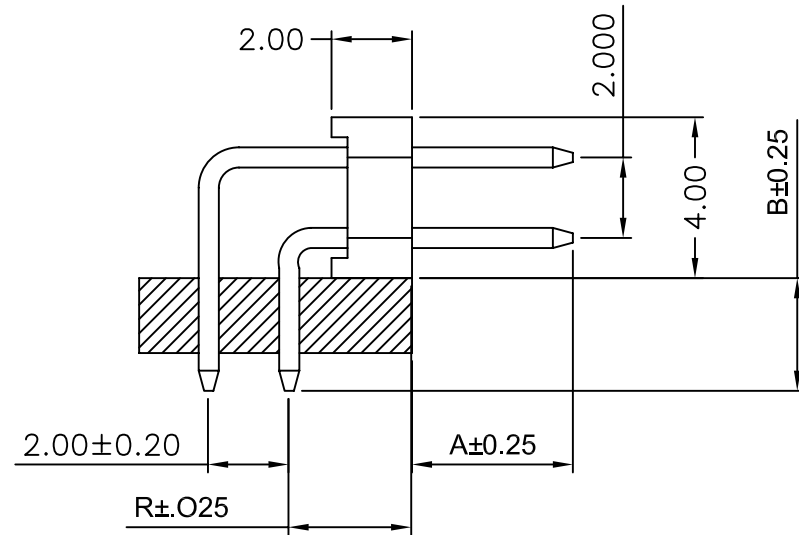

Ordering Information

HMIDR X - XX XX XXX P B

Material High: 1=1.5MM, 2=2.0MM  
 No. of Pins Per Row: 02=40  
 Standard Plating: 01=Gold Flash, 02=Gold 3U, 11=Tin, XX=Select Plating  
 Pin Length: 001=4.0 / 3.5/2.8, XXX=Select A/R/B  
 Material: L=LCP, T=NLGT, P=PBT  
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
		Andy2005.08.12			
X. ±0.38	X'. ±5°	CHECK	DATE	FILE NAME (品名)	2.0MM Header R/A TYPE
.XX ±0.25	.X' ±2°	APPRO.	DATE	PART NO (料号)	HMLDRX-XXXXXXXXPB
.XXX ±0.13	.XX' ±1°			DRAWING NO.(图号)	HMLDRX-01
UNIT:mm	SCALE 1:1				
A4	SHEET: 1 of 1				