


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL94V-0
 Nylon-6T
 All materials must be GP materials

RECOMMENDED P.C.B LAYOUT

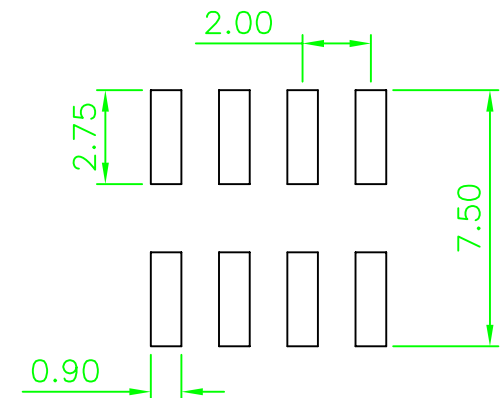

Ordering Information

HMLDSVH - XX XX XXX T B X

No. of Pins Per Row 03-40
 Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating
 Pin Length 001=A=4.0/7.0/4.5 L=LCP XXX=Select A/H/W T=6T
 Material B=Brass P=Phosphoric Bronze
 Material
 Packing TR=Tape+Reel T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X' ± 5° .X' ± 2° .XX' ± 1° .XXX' ± 0.5°	Andy2005.08.12
UNIT:mm	SCALE 1:1	CHECK DATE
A4	SHEET: 1 of 1	APPRO. DATE

 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	2.0MM Header SMT TYPE
PART NO (料号)	HMLDSVH-XXXXXXXTBX
DRAWING NO.(图号)	HMLDSVH-05
	REV:AO