

Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C


Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board


Hole Layout

(Tolerance: ±0.05)

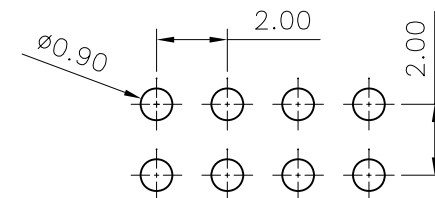

Ordering Information

HMIDS	X	-	XX	XX	XXX	T	B
	└		└	└	└	└	└
Material High	No. of Pins	Standard Plating	Pin Length	Material	Material		
1=1.5MM	Per Row	01=Gold Flash	001=4.0 / 2.8	L=LCP	B=Brass		
2=2.0MM	02-40	02=Gold 3U"	XXX>Select A/B	T=NL6T	P=Phosphoric Bronze		
		11=Tin		P=PBT			
		XX>Select Plating					

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±	X' ±5°	Andy2005.08.12		
.X ±0.38	.X' ±2°	CHECK DATE	FILE NAME (品名)	2.0MM Header Dip TYPE
.XX ±0.25	.XX' ±1°	APPRO. DATE	PART NO (料号)	HMLDSX-XXXXXXTB
.XXX ±0.13	.XXX' ±0.5°		DRAWING NO.(图号)	HMLDSX-01
UNIT:mm	SCALE 1:1			REV.AO
A4	SHEET: 1 of 1			