


Specifications

Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T
 All materials must be GP materials

Recommended P.C.Board Layout

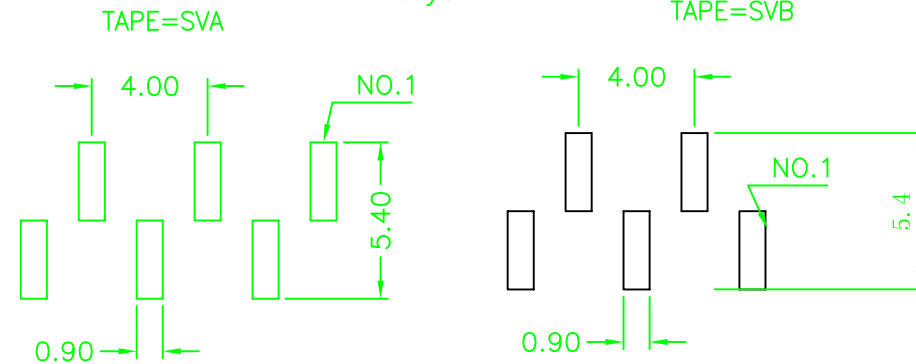

Ordering Information

HMLSSVXX	-	XX	XX	XXX	T	B	X
Material High 1=1.5MM 2=2.0MM	No. of Pins Per Row 03-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=A=4, 0/4, 0/5, 8 XXX=Select A/H2/W	Material L=LCP T=NL6T	Material B=Brass P=Phosphoric Bronze	Packing TR=Tape+Reel T=Tube	

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE Andy2005. 08. 12	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	CHECK DATE		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.0MM Header SMT TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HMLSSVXX-XXXXXXXXTBX
			DRAWING NO.(图号)	HMLSSVXX-05
			REV.	AO