


Specifications


Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 PBT
 All materials must be GP materials

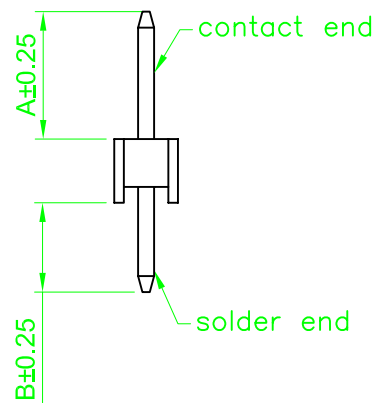

Recommended P.C.Board
 Hole Layout
 (Tolerance: ±0.05)



Ordering Information

HMISS X	-	XX	XX	XXX	P	B
Material High 1=1.5MM 2=2.0MM		No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=4.0 / 2.8 XXX=Select A/B	Material L=LCPC T=6T P=PBT	Material B=Brass P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ± 0.38 .XX ± 0.25 .XXX ± 0.13	.X° ± 5° .X° ± 2° .XX° ± 1° .XXX° ± 0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.0MM Header Dip TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMLSSX-XXXXXXXXPB
			DRAWING NO.(图号)	HMLSSX-01
			REV.	AO