
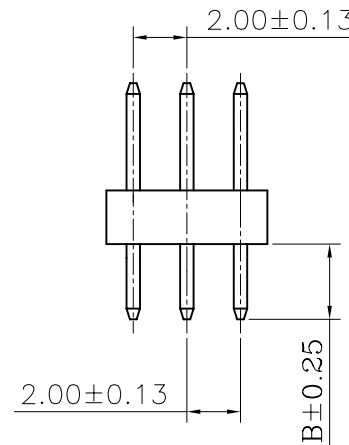


Tolerance:0.05mm
Recommended P.C.B. Layout

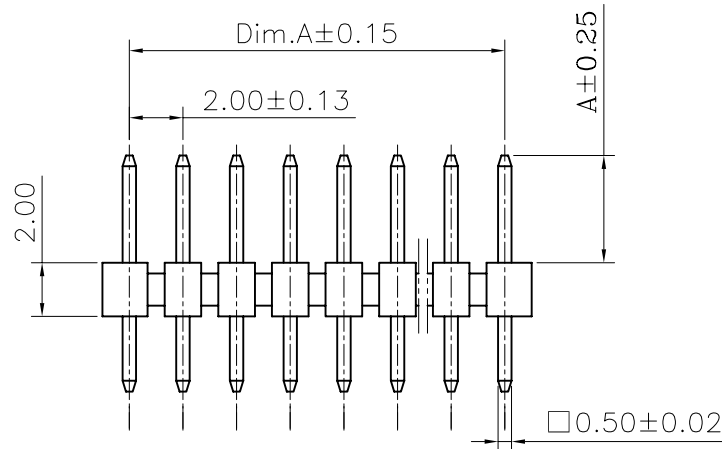

- Specifications
Current Rating: 2Amp.
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 500VAC.
Contact Resistance: 20mΩ Max.
Operating Temperature:-55°C to +105°C.
- Materials
Contact Material: Phosphor Bronze.
Insulator Material: LCP,UL94V-0,Color:Black.
- All materials must be GP materials.

No. of PIN/ROW	Dimension Information	
	A	B
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

Ordering Information

HMLTS 2 - XX XX XXX L B

No. of Pins Per Row 02-40
Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating
Pin Length 001=4.0 /2.8 XXX=Select A/B
Material L=LCP T=NL6T B=Brass P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ±0.38 .XX ±0.25 .XXX ±0.13	X. ±5° .X ±2° .XX ±1° .XXX ±0.5°	Andy2005.08.12	
UNIT:mm	SCALE 1:1	CHECK	DATE
A4	SHEET: 1 of 1	APPRO.	DATE
All Connectors www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25			
FILE NAME (品名)		2.0MM Header Dip TYPE	
PART NO (料号)		HMLTS2-XXXXXXLB	
DRAWING NO.(图号)		HMLTS2-01	REV.A0