

Specifications:

Current rating:1 Amps

Dielectric Withstanding:AC 500V

Operating Temperature:-25°C ~ +105°C

Contact resistance:20mohm max.




Insulation resistance:5,000Mohm min.

Materials:

Insulator:Polyester(UL94V-0)

Contact material:Brass

Plating:Gold flash

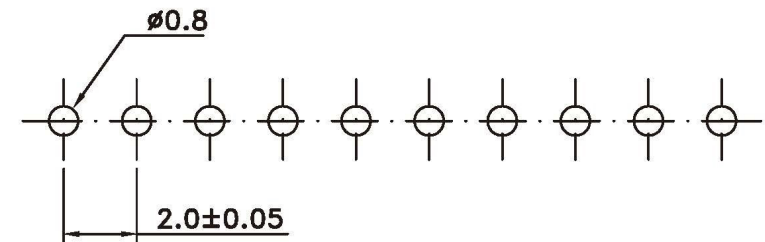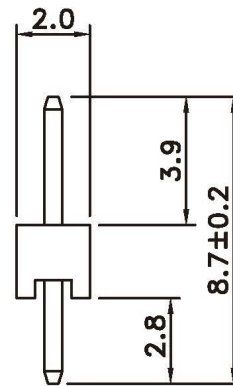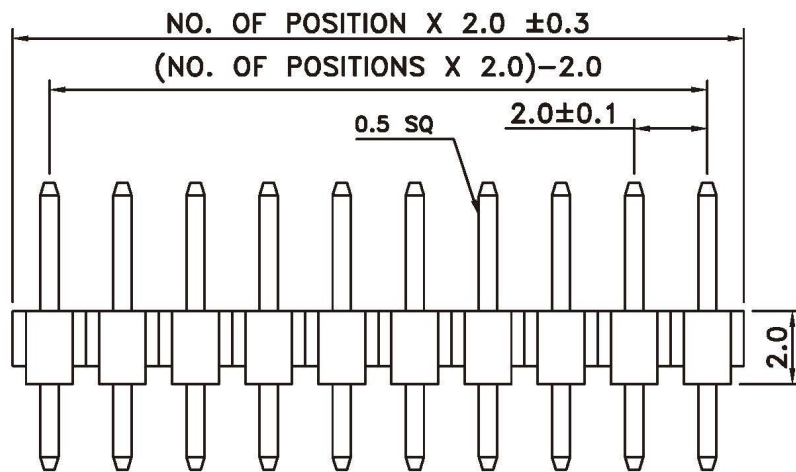

P.C.B. LAYOUT


All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25


RoHS Compliant

TOLERANCES ARE

DRAWING BY CY		X ± .X ± 0.20 .XX ± 0.15 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT/ mm	SCALE 1 : 1	
DATE		
SIZE A4	P PROJECTION	



ORDER INFORMATION

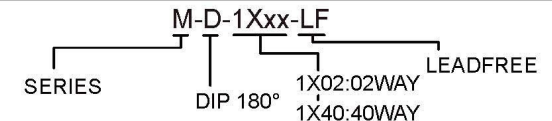

DESCRIPTION: 2.0MM PIN HEADER SINGLE ROW STRAIGHT TYPE