
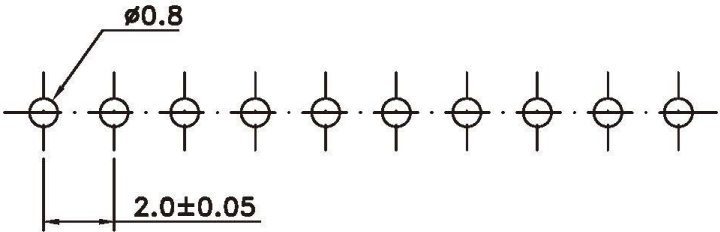
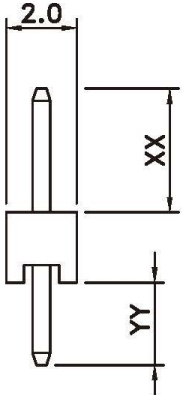


**Specifications:**

Current rating:1 Amps  
 Dielectric Withstanding:AC 500V  
 Operating Temperature:-25°C ~ +105°C  
 Contact resistance:20mohm max.  
 Insulation resistance:5,000Mohm min.

**Materials:**

Insulator:Polyester(UL94V-0)  
 Contact material:Brass  
 Plating:Gold flash

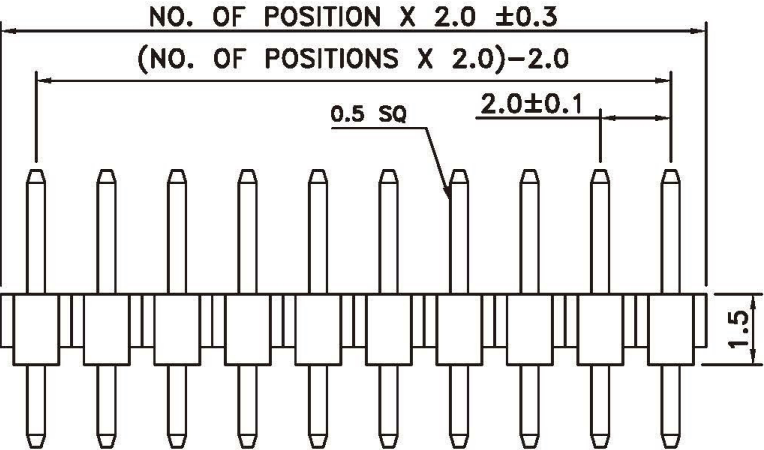

**P.C.B. LAYOUT**

**RoHS Compliant**

**TOLERANCES ARE**

**All Connectors**

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm


SCALE 1 : 1

DATE


SIZE A4

X ±  
 .X ± 0.20  
 .XX ± 0.15  
 .XXX ±  
 ANG ±

P PROJECTION



**ORDER INFORMATION**

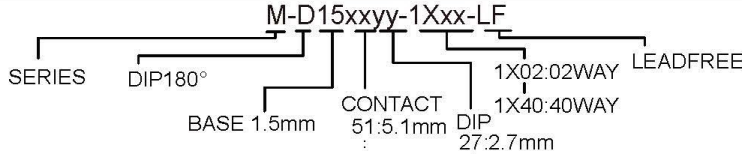

**DESCRIPTION: 2.0MM PIN HEADER SINGLE ROW STRAIGHT TYPE**

www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25