


Recommended P.C.Board
Layout

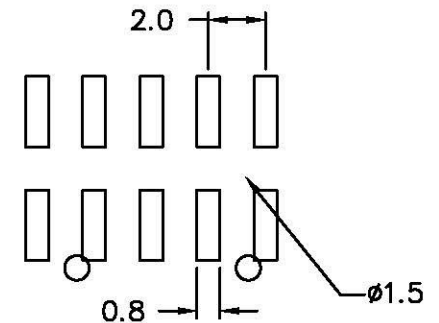

Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy Gold Flash
 Insulator Material: Polyester, UL94V-0
 NYLON-6T

RoHS Compliant

All Connectors


www.allconnectors.de
 Tel: +49 717 2019103
 70794 Filberstadt Germany

info@allconnectors.de
 Fax: +49 717 2019104
 R40100001.25

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±



ORDER INFORMATION

M-V22P-2Xxx-LF
 SERIES | LEADFREE
 180°SMT | 2X03:06WAY
 POST | 2X40:80WAY
 HIGH 2.2mm

DESCRIPTION: 2.0 PIN HEADER DUAL ROW SMT TYPE