


## 2.54mm PITCH PIN HEADER, SINGLE ROW TERMINAL STRIP VERTICAL, SMT, ROHS COMPLIANT

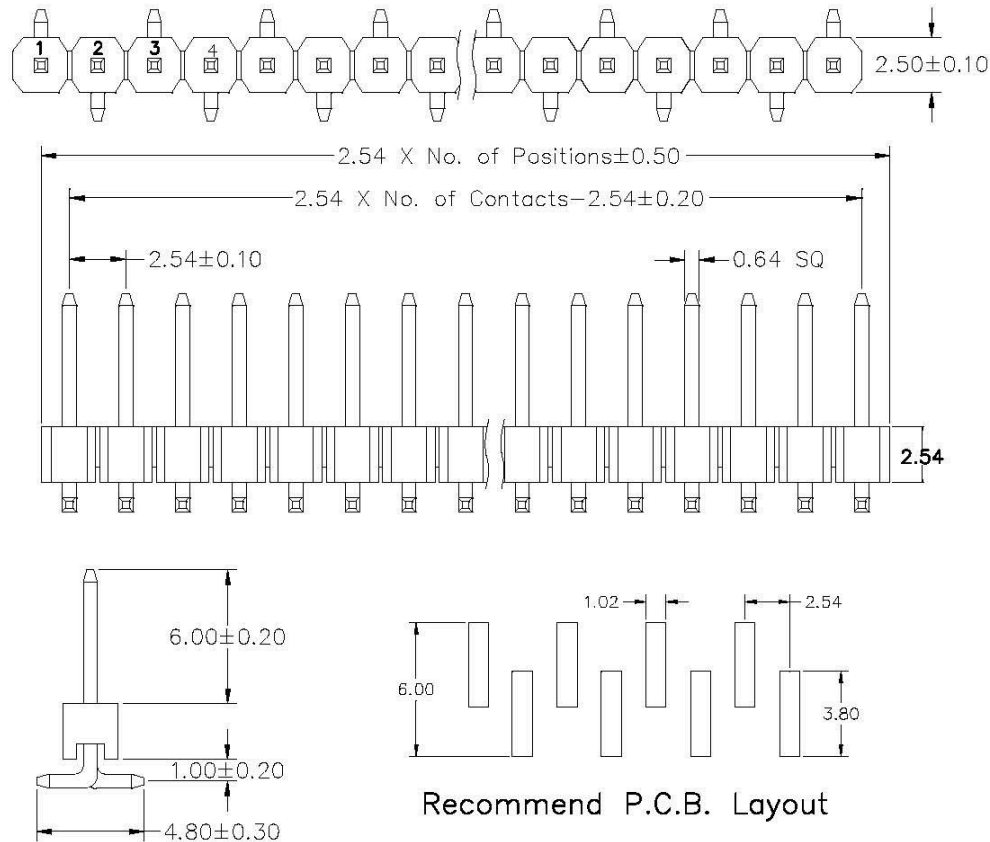

### Material Information:

Contact: Brass  
 Insulator: PA6T+30%G. F, (UL94V-0)  
 Plating: Au or Sn plated over 50 U' Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 3A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C





### Ordering Information

APMV25 - XX XX XX B1 X  
 ① ② ③

- ① No. of Contacts: 02 To 40
- ② Plating Option:  
 01: Gold Flash Over All  
 05: 5U' Gold plated Over All  
 10: 10U' Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray B: PE Bag  
 C: Cube

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)	APMV25-XXXXXXB1X
		单位 (UNIT)	MM			
审核 (CHECKED)	刘思晴	比例 (SCALE)	1:1	0.0 ± 0.30	品名 (NAME)	2.54排针 单排 立贴
		版本 (EDITION)	A			
核准 (APPROVE)		日期 (DATE)	2013/12/13	0.00 ± 0.20		

## 2.54mm PITCH PIN HEADER, SINGLE ROW TERMINAL STRIP VERTICAL, SMT, ROHS COMPLIANT

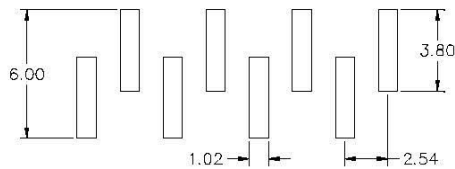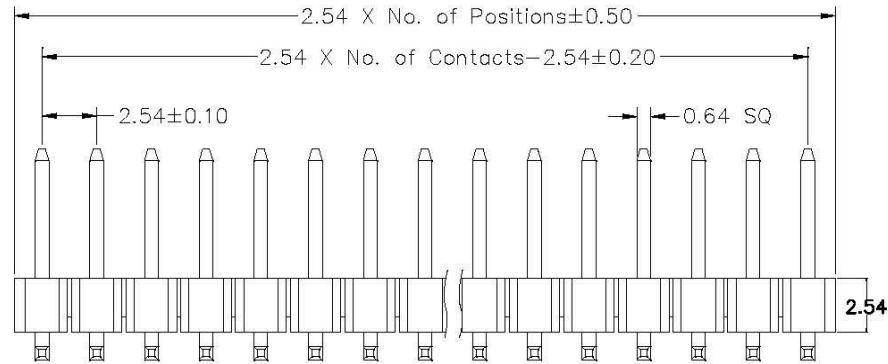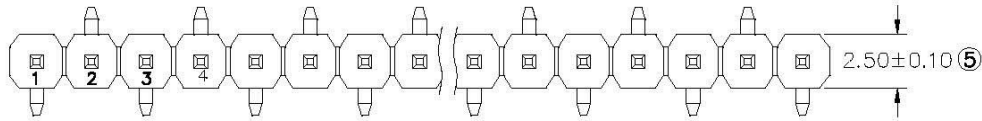

Recommend P.C.B. Layout

### Material Information:

Contact: Brass  
 Insulator: PA6T+30%G.F, (UL94V-0)  
 Plating: Au or Sn plated over 50 U' Ni  
 All materials compliant with ROHS

### Technical Specifications:

Current Rating: 3A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

### Ordering Information

APMV25 - XX 01 XX B1 X  
 ①                      ②                      ③

- ① No. of Contacts: 02 To 40
- ② Plating Option:  
 01: Gold Flash Over All  
 05: 5U' Gold plated Over All  
 10: 10U' Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray B: PE Bag  
 C: Cube

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)	APMV25-XX01XXB1X
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30	品名 (NAME)	
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.20		2.54排针, 单排 立贴
		版本 (EDITION)	A			
		日期 (DATE)	2013/12/13			