
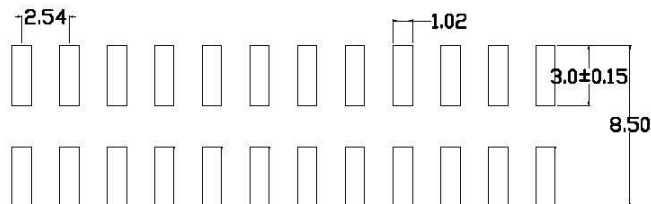

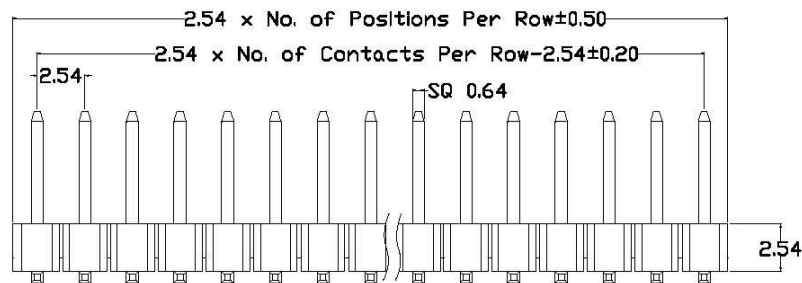


2.54mm PITCH PIN HEADER, DOUBLE ROW TERMINAL STRIP VERTICAL, SMT, ROHS COMPLIANT

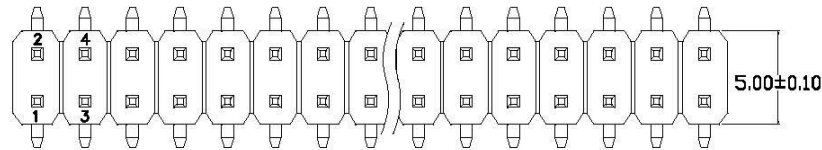

Material Information:

Contact: Brass
 Insulator: PA6T+30%G.F, (UL94V-0)
 Plating: Au or Sn plated over 50 U' Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 3A
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000M Ωmin
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -40° C to +105° C

Ordering Information

APMW25 - XX XX XX B1 X
 ① ② ③

- ① No. of Contacts Per Row: 02 To 40
- ② Plating Option:
 01: Gold Flash Over All
 05: 5U' Gold plated Over All
 10: 10U' Gold Plated Over All
 0S: Tin Plated Over All
- ③ Packing Option:
 A: Plastic Tray B: PE Bag
 C: Cube

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7002833
 70721 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7002904
 Kettenerstr. 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)		料号 (PART NO)	APMW25-XXXXXXB1X
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30		品名 (NAME)	2.54排针 双排 立贴
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.20			
		版本 (EDITION)	A				
		日期 (DATE)	2013/12/13				