
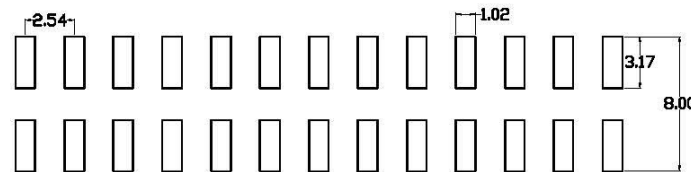
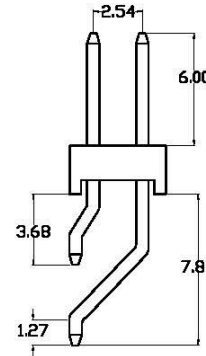
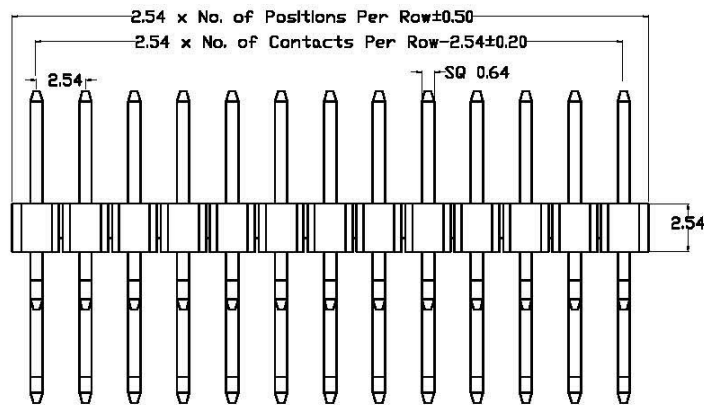


2.54mm PITCH PIN HEADER, DOUBLE ROW TERMINAL STRIP HORIZONTAL, SMT, ROHS COMPLIANT



Recommended P.C.B. Layout

Material Information:

Contact: Phosphor Bronze
 Insulator: PA6T+30%G.F. (UL94V-0)
 Plating: Au or Sn plated over 50 U' Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 3A
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000M Ωmin
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -40° C to +105° C

Ordering Information

APOW25 - XX XX XX B2 X
 ① ② ③

- 1 No. of Contacts Per Row: 02 To 40
- 2 Plating Option:
 01: Gold Flash Over All
 05: 5U' Gold plated Over All
 10: 10U' Gold Plated Over All
 0S: Tin Plated Over All
- ③ Packing Option:
 A: Plastic Tray B: PE Bag
 C: Cube

Allconnectors

www.allconnectors.de info@allconnectors.de
 Tel: 0049 711 709503 Fax: 0049 711 709504
 70741ildertraut - Germany Rep:tema.rtr.de

绘图 (DRAWN) 孙高田
 审核 (CHECKED) 刘思晴
 核准 (APPROVE)

孙高田
 刘思晴

投影 (PROJECT) 
 单位 (UNIT) MM
 比例 (SCALE) 1:1
 版本 (EDITION) A
 日期 (DATE) 2013/12/13

公差 (TOLERANCE)
 0.0 ± 0.30
 0.00 ± 0.20

料号 (PART NO)
 品名 (NAME)

APOW25-XXXXXXB2X
 2.54 排针 双排 卧贴