

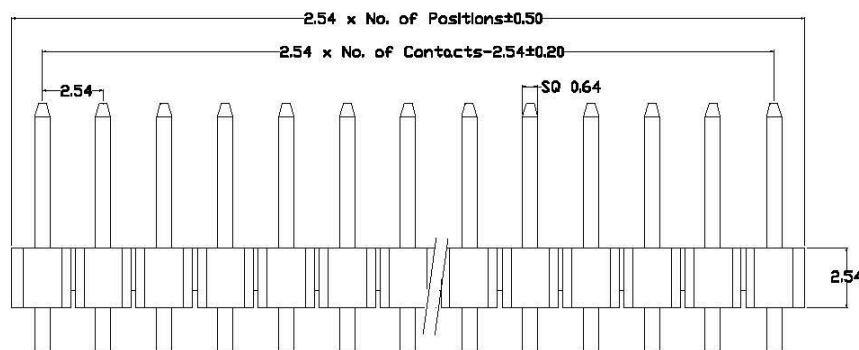


2. 54mm PITCH PIN HEADER, SINGLE ROW TERMINAL STRIP THROUGH HOLE, RIGHT ANGLE, ROHS COMPLIANT

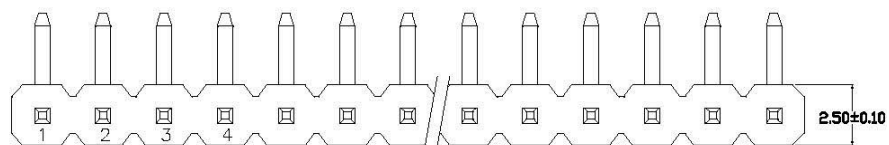

Material Information:

Contact: Brass

Insulator: PA6T+30%G.F. (UL94V-0)

Plating: Au or Sn plated over 50 U' Ni

All materials compliant with ROHS

Technical Specifications:

Current Rating: 3A

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000M Ωmin

Dielectric Voltage: 500V AC/minute

Operation Temperature: -40° C to +105° C

Ordering Information

APRV25 - XX XX XX B1 X
 ① ② ③

① No. of Contacts Per Row: 01 To 40

② Plating Option:

01: Gold Flash Over All

05: 5U' Gold plated Over All

10: 10U' Gold Plated Over All

0S: Tin Plated Over All

③ Packing Option:

A: Plastic Tray B: PE Bag

C: Cube

All Connectors

www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filberstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25

绘图 (DRAWN)

孙高田

审核 (CHECKED)

刘思晴

核准 (APPROVE)

投影 (PROJECT)



单位 (UNIT)

MM

比例 (SCALE)

1:1

版本 (EDITION)

A

日期 (DATE)

2013/12/13

公差 (TOLERANCE)

0.0 ±0.30

0.00 ±0.20

料号
(PART NO)

APRV25-XXXXXB1X

品名
(NAME)

2.54排针 单排 90°