
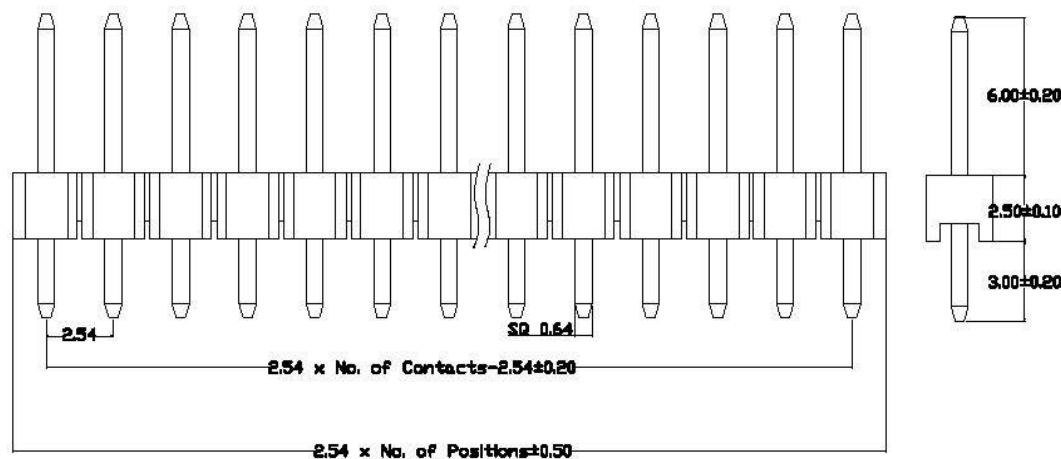


2.54mm PITCH PIN HEADER, SINGLE ROW TERMINAL STRIP, VERTICAL, STRAIGHT, ROHS COMPLIANT



Material Information:

Contact: Brass
 Insulator: PA6T+30%G. F (UL94V-0)
 Plating: Au or Sn plated over 50 U'' Ni
 All materials compliant with ROHS

Technical Specifications:

Current Rating: 3A
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000M Ωmin
 Dielectric Voltage: 500V AC/minute
 Operation Temperature: -40° C to +105° C

Ordering Information

APSV25 - XX XX XX B1 B
 ① ② ③

- ① No. of Contacts: 01 To 40
- ② Plating Option:
 01: Gold Flash Over All
 05: 5U'' Gold plated Over All
 10: 10U'' Gold Plated Over All
 0S: Tin Plated Over All
- ③ Packaging:
 B: PE Bag

All Connectors

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 700590 Fax: 0049 711 7005901
 70764 Filderstadt - Germany Keltenerstr. 25

绘图 (DRAWN)	孙高田	投影 (PROJECT)		公差 (TOLERANCE)	料号 (PART NO)	APSV25-XXXXXXB1B
审核 (CHECKED)	刘思晴	单位 (UNIT)	MM	0.0 ± 0.30		
核准 (APPROVE)		比例 (SCALE)	1:1	0.00 ± 0.20	品名 (NAME)	2.54排针 单排 180°
		版本 (EDITION)	A			
		日期 (DATE)	2013/12/13			