


## 2.54mm PITCH PIN HEADER, DOUBLE ROW TERMINAL STRIP VERTICAL, STRAIGHT, ROHS COMPLIANT

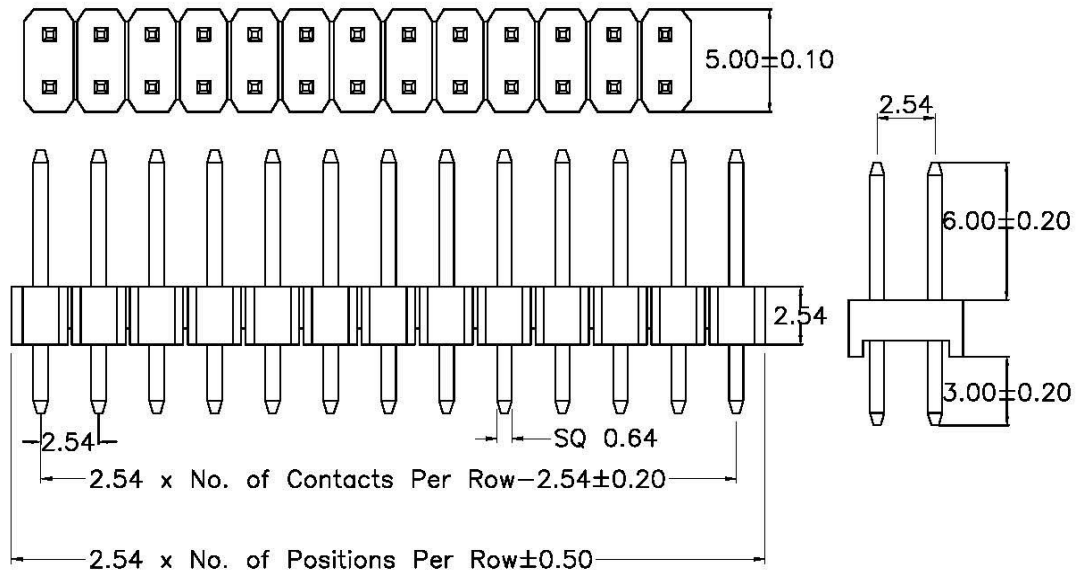

**Material Information:**

Terminal: Brass  
 Insulator: PA6T+30%G. F, (UL94V-0)  
 Plating: Au or Sn plated over 50 U" Ni  
 All materials compliant with ROHS


**Technical Specifications:**

Current Rating: 3A  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000M Ωmin  
 Dielectric Voltage: 500V AC/minute  
 Operation Temperature: -40° C to +105° C

**Ordering Information**

APSW25 - XX XX XX B1 X  
 ①            ②            ③

- ① No. of Contacts Per Row: 01 To 40
- ② Plating Option:  
 01: Gold Flash Over All  
 05: 5U" Gold plated Over All  
 10: 10U" Gold Plated Over All  
 0S: Tin Plated Over All
- ③ Packing Option:  
 A: Plastic Tray B: PE Bag



RECOMMENDED PCB LAYOUT



www.allconnectors.de      info@allconnectors.de  
 Tel: 0049 711 7009303      Fax: 0049 711 7009304  
 40791 Hilderstadt - Germany      Kettnerstr. 25

绘图 (DRAWN) 孙高田 审核 (CHECKED) 刘思晴 核准 (APPROVE)	投影 (PROJECT)		公差 (TOLERANCE)		料号 (PART NO)	APSW25-XXXXXXB1X
	单位 (UNIT)	MM	0.0 ± 0.30		品名 (NAME)	2.54排针 双排 180°
	比例 (SCALE)	1:1	0.00 ± 0.20			
	版本 (EDITION)	A				
	日期 (DATE)	2013/12/14				