

MATERIAL

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

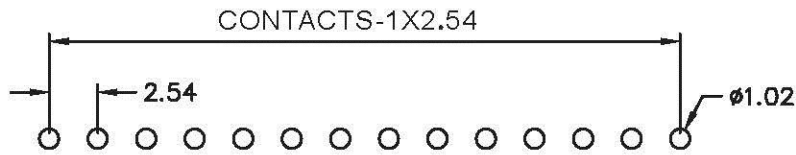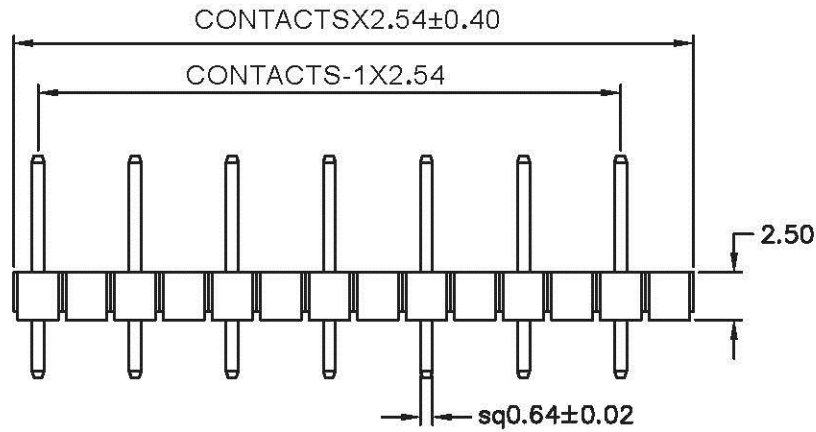

Recommended P.C.B Layout

H-D-1XxxEE-LF
LEADFREE

RoHS Compliant

All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filzstätt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

PART NO. H-D-1XxxEE

DWG NO. H-D-1XxxEE

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:

PIN HEADER 2.54*2.54mm
STRAIGHT TYPE, SINGLE ROW

AREA

REVISIONS

DATE