

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass





SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature : -55°C to +105°C

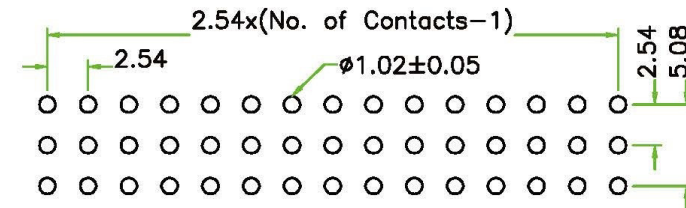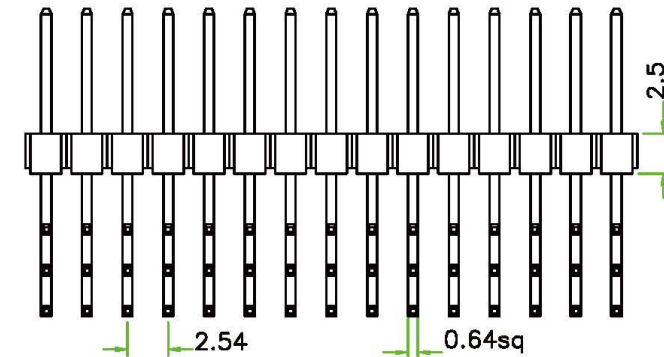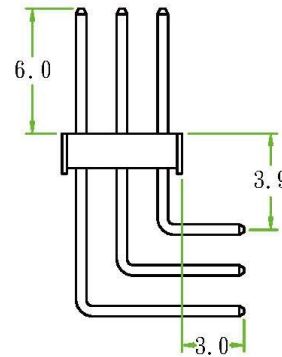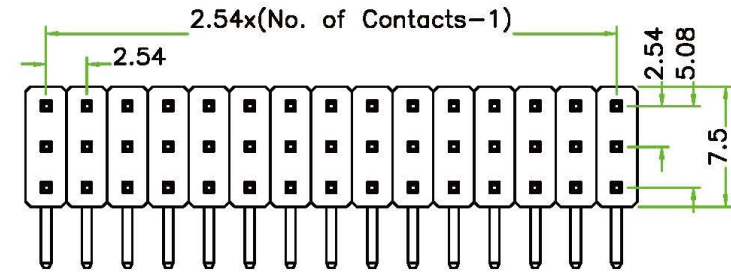

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

All Connectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

X ±
X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION



ORDER INFORMATION

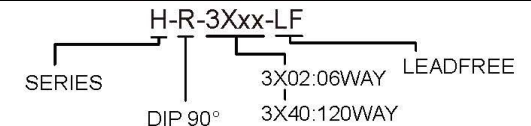

DESCRIPTION: 2.54MM PIN HEADER RIGHT ANGLE TYPE

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt - Germany

Kettnerstr. 25